



*Atmospheric Measurement Techniques Discussions* is the access reviewed  
discussion forum of *Atmospheric Measurement Techniques*

# Airborne multi-axis DOAS measurements of atmospheric trace gases on CARIBIC long-distance flights

B. Dix<sup>1,\*</sup>, C. A. M. Brenninkmeijer<sup>2</sup>, U. Frieß<sup>1</sup>, T. Wagner<sup>2</sup>, and U. Platt<sup>1</sup>

<sup>1</sup>Institute of Environmental Physics, University of Heidelberg, Heidelberg, Germany

<sup>2</sup>Max Planck Institute for Chemistry, Mainz, Germany

\* now at: Department of Chemistry and Biochemistry, University of Colorado, Boulder, USA

Received: 1 December 2008 – Accepted: 8 January 2009 – Published: 5 February 2009

Correspondence to: B. Dix (barbara.dix@colorado.edu)

Published by Copernicus Publications on behalf of the European Geosciences Union.

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Abstract

AMTD

2, 265–301, 2009

A DOAS (Differential Optical Absorption Spectroscopy) instrument was implemented and operated onboard a long-distance passenger aircraft within the framework of the CARIBIC project (Civil Aircraft for the Regular Investigation of the atmosphere Based on an Instrument Container). The instrument was designed to keep weight, size and power consumption low and to comply with civil aviation regulations. It records spectra of scattered light from three viewing directions (nadir, 10° above and below horizon) using a miniaturized telescope system. The telescopes are integrated in the main pylon of the inlet system which is mounted at the belly of the aircraft. Fibre bundles transmit light from the telescopes to spectrograph-detector units inside the DOAS container instrument. The latter is part of the removable CARIBIC instrument container, which is installed monthly on the aircraft for a series of measurement flights.

During 30 flight operations within three years, measurements of HCHO, HONO, NO<sub>2</sub>, BrO, O<sub>3</sub> and the oxygen dimer O<sub>4</sub> were conducted. All of these trace gases except BrO could be analysed with a 30 s time resolution. HONO was detected for the first time in a deep convective cloud over central Asia. BrO, NO<sub>2</sub> and O<sub>3</sub> could be observed in tropopause fold regions, biomass burning signatures over South America could be seen and measurements during ascent and descent provided information on boundary layer trace gas profiles (e.g. NO<sub>2</sub> or HCHO).

## 20 1 Introduction

Earth's atmosphere is a complex and variable system that calls for short-and long-term observations with sufficient spatial and temporal resolution. The CARIBIC aircraft project (Civil Aircraft for the Regular Investigation of the atmosphere Based on an Instrument Container) is a comprehensive approach to obtain detailed long-term observations over large sections of the globe. It represents a successful European enterprise to operate an automated instrument container on board a passenger long-distance

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



aircraft. Presently an Airbus (A340-600) of the German airline Deutsche Lufthansa is being used. The instrument container accommodates more than 20 in-situ instruments to measure atmospheric constituents like CO, O<sub>3</sub>, H<sub>2</sub>O, NO, NO<sub>y</sub>, Hg as well as aerosol number density (Brenninkmeijer et al., 2007). A novel feature of this project (CARIBIC Phase 2) is a DOAS instrument to measure formaldehyde (HCHO), nitrous acid (HONO), nitrogen dioxide (NO<sub>2</sub>), bromine oxide (BrO) and ozone (O<sub>3</sub>), thus adding a remote sensing capability to CARIBIC. Being a small and light system with very low power consumption, this DOAS setup is particularly well suited for such a project. Measurement flights started in 2005 and will continue until at least 2014.

Unlike previous airborne DOAS measurements (e.g. Wahner et al., 1990; Heue et al., 2005; Bruns et al., 2004, 2006; Wang et al., 2005, 2006), the DOAS system in CARIBIC represents the first long-term and long-distance approach. CARIBIC is helping to fill the gap between ground- and space-based observations: While in-situ measurements and sampling provides detailed information on the upper troposphere and lower stratosphere (UTLS), the main focus of the CARIBIC DOAS instrument is trace gas measurements in the free troposphere. The specific Multi-Axis DOAS viewing geometry shown in Fig. 1 attains a higher sensitivity towards the free troposphere than most satellite geometries, whereas ground-based instruments are typically most sensitive to the planetary boundary layer. Even though the CARIBIC measurements are confined to the given flight tracks, spatial and temporal resolution are high. The CARIBIC DOAS measurements are in particular motivated by the interest to study the global tropospheric distribution of trace gases such as BrO (particularly in the mid-latitudes and tropics) or HONO, since many open questions remain regarding the global sources, abundance and sinks of these species (e.g. v. Glasow et al., 2004; Simpson et al., 2007; Lammel and Cape, 1996; Saiz-Lopez et al., 2006; Kleffmann et al., 1998; Acker et al., 2006; Volkamer et al., 2007). In addition to measurements at flight altitude, observations during ascent and descent of the aircraft provide information on trace gas concentration profiles in the planetary boundary layer.

After nearly three years of regular measurement flights (with a total of 30 flights

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



where DOAS data were collected), a broad spectrum of different findings underlines the significance of the DOAS measurements. For example, HONO has been detected in deep convective clouds for the first time, and on some flights BrO, NO<sub>2</sub> and O<sub>3</sub> could be observed in tropopause fold regions, indicating troposphere-stratosphere exchange.

5 In this study the technical realization and flight performance of the CARIBIC DOAS instrument are presented. First, the MAX-DOAS technique is introduced and a detailed description of the instrumental setup is given. The second part is dedicated to flight performance and data analysis, while the third part presents selected results.

## 2 Instrumental setup

### 10 2.1 Overview

The CARIBIC system consists of an instrumented container, which is deployed monthly in the forward cargo compartment, and of an inlet (see Fig. 2, left panel), permanently mounted on the aircraft fuselage to provide air samples for the instruments in the container. For the DOAS measurements, a telescope system is integrated in the main 15 pylon of the inlet system (see Fig. 2, right panel). The light is transmitted via quartz fibre bundles to three spectrograph-detector units of identical design inside the DOAS container instrument, where spectra of UV-visible scattered sun light are recorded. When the container is absent, the fibre bundles are stored in the aircraft at the Container Connector Bracket (CCB, see Fig. 2, left panel), and the DOAS windows in the 20 pylon are sealed-off.

The well established DOAS method (Platt and Perner, 1980; Platt, 1994; Platt and Stutz, 2008) is used to identify trace gases by means of their individual differential (i.e. narrow band) absorption structures. With this method BrO, NO<sub>2</sub>, HONO, HCHO, O<sub>3</sub> and the oxygen dimer O<sub>4</sub> were measured during CARIBIC flights. Spectra are recorded 25 between 320 and 460 nm with a 30 s time resolution from three different viewing directions, namely 10° above and below horizon and nadir (see Fig. 1). By applying different

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



telescope elevation angles ( $\alpha$ , see Fig. 1), the measurements become sensitive to different atmospheric layers, which is the essence of the Multi-AXis- (MAX-) DOAS approach. Since MAX-DOAS utilises scattered sun light as a light source, there is no well defined single light path (although in many cases the general dependencies of MAX-DOAS observations can be well described by a single scattering approximation, see Fig. 1). Therefore the result of the DOAS analysis is a Slant Column Density (SCD), which is the weighted average over the integrated concentrations along all possible light paths (e.g. Solomon et al., 1987; Perliski and Solomon, 1993; Marquard et al., 2000).

The sensitivity of this type of viewing geometry can be expressed by Box-AirMassFactors (Box-AMFs), as shown in Fig. 3. These Box-AMFs are calculated with Tracy II (Deutschmann and Wagner, 2006; Wagner et al., 2007), a backward Monte Carlo radiative transfer model. They quantify the contribution of a thin layer of trace gas to the SCD and thus the DOAS signal. Box-AMFs are calculated for a typical cruising altitude and Solar Zenith Angle (SZA) at a wavelength of 355 nm, which is representative for most trace gases observed during the experiments. Each Box-AMF denotes how sensitive the measurements are towards changes of the vertical trace gas column within a given box, i.e. an atmospheric layer of height  $h$ . It is apparent that the slant viewing directions yield the highest sensitivities to atmospheric layers directly above and below the aircraft. The nadir direction exhibits overall smaller Box-AMFs, yet it provides the highest sensitivity towards layers near the surface.

Overall, the CARIBIC DOAS instrument is designed to keep weight and power consumption low. The equipment is reduced to essential parts and miniaturized where possible. The telescope system could be realized by three miniaturized telescope units, housed in a small aluminium block (see Fig. 4). The DOAS container instrument fits in one of five 19" racks of the CARIBIC instrument container, weighs 16 kg and needs 75 W at maximum cooling power. It houses three temperature stabilized custom made spectrograph-detector units based on Ocean Optics USB2000 miniature spectrometers, power supplied via USB by an embedded PC (see Sect. 2.4 below).

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Apart from restricted weight and power consumption, all components must be able to sustain vibrations and the inlet system needs to sustain substantial daily temperature differences over many years. Moreover, using a passenger aircraft for regular measurements requires that all instrumentation needs to be built in compliance with civil aviation regulations, which in summary leads to the following requirements: (1) All instruments need to pass an electromagnetic compatibility test. (2) Measurements must be fully automated and controlled by a master computer. (3) All parts permanently installed in the aircraft should be maintenance free.

5

## 2.2 The telescope system in the pylon

- 10 As stated above, the telescope system consists of three miniaturized telescope units, mounted in a  $120 \times 70 \times 15$  mm aluminium block. Figure 4 (left panel) shows a drawing of the telescope block. Each telescope unit serves as entrance optics for its respective viewing directions. The pylon is mounted at the lower side of the aircraft body at an angle of  $8^\circ$  to the right (looking in flight direction) from the vertical. Therefore the 15 “nadir” viewing telescope looks  $8^\circ$  from the true nadir direction. Each telescope unit consists of a quartz lens, one or two quartz prisms and a filter (Schott UG5). The filter reduces the intensity of radiation for wavelengths above 400 nm to reduce stray light in the desired wavelength range (320–400 nm). Incoming light is reflected by  $90^\circ$ , using prisms ( $5 \times 5$  mm), and then focused on the entrance of quartz fibre bundles by 20 lenses ( $f=15$  mm). The units are air tight to prevent condensation of water vapour on optical components. During measurement flights, the telescope block is heated (15 W, unregulated) to avoid freezing of water on the outside surface of the entrance optics (prisms). The field of view of each telescope is  $1.9^\circ$  (full angle). For a typical flight altitude of 10 km, aircraft velocity of 900 km/h, and time resolution of 30 s, the ground 25 pixel covered by the nadir field of view is 0.33 km (cross track) by 7.8 km (along track).

The quartz fibre bundles are connected to the telescopes by 1/16" Swagelok Ultra Torr adapters that are hermetically sealed, with their nuts secured using an adhesive that sustains large temperature variations. The sealing o-ring of each adapter was

AMTD

2, 265–301, 2009

---

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



replaced by a silicone ring compatible with temperatures as low as  $-60^{\circ}\text{C}$ . Before each measurement flight the telescope prisms are inspected and cleaned if necessary. After the flight the telescope entrance holes are covered with metal tape to eliminate foreign object debris. The telescope system is otherwise maintenance free.

AMTD

2, 265–301, 2009

## 5 2.3 The quartz fibre bundles

The telescope units are connected to the spectrometers by three 5 m long quartz fibre bundles, each consisting of 4 individual quartz fibres with a diameter of  $210\,\mu\text{m}$  and a numerical aperture of 0.22 ( $f/2$ ). At the telescope end, the four fibres are arranged in a rectangular geometry to fit the area illuminated by the quartz lens. At the spectrometer 10 end (exit) the fibre bundles are arranged in a column, in order to optimize the illumination of the the  $50\,\mu\text{m}$  wide and  $1000\,\mu\text{m}$  high spectrometer entrance slit. A quartz fibre bundle has a greater tolerance to bending, compared to a single thicker fibre. The greater tolerance was necessary as the integration of the fibre bundles in the inlet system required a bending radius of as low as 60 mm. Also, fibre bundles are known for 15 largely reducing the polarization sensitivity of grating spectrometers (Stutz and Platt, 1997).

Figure 4 (right panel) shows a photograph of the DOAS telescope block, taken during the assembly of the inlet system. The whole procedure of installing the inlet system with the DOAS block was a rather complex procedure. The entire inlet system had 20 been fully pre-assembled prior to aircraft mounting. Since the instrument connectors of the three quartz fibre bundles were too bulky to fit through the inlet system, the respective telescope ends were fed from the aircraft above through the inlet via a metal tube upon aircraft installation. This tube served as a guide during the installation, and prevents damage to the fibre bundles in use. After this the optical connection with the 25 Ultra Torr adaptors was made, and the inlet system was slowly raised until contact with the fuselage. Finally the three fibre bundles were sealed with aviation type potting mix inside a 1/2 inch piece of stainless steel tubing that was held by a bulk union (Swagelok) mounted in the so called “pressure box”, i.e. the pressure seal feed-trough inside the

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



aircraft (Inlet Connector Bracket, ICB, see Fig. 2, left panel). Inside the aircraft, the quartz fibre bundles run underneath the cargo compartment floor panels from the ICB to the CCB. The CCB is a 30 cm square, 15 cm deep through in the floor, containing all inlet tubing. The fibre bundles are stored in a drum inside the CCB and are carefully uncoiled and connected to the DOAS instrument upon installing the container in the aircraft. Straps support the fibre bundles from the CCB to the instrument 1.20 m above the CCB.

## 2.4 The DOAS container instrument

Figure 5 provides a block diagram of the container component of the DOAS instrument.  
10 Apart from the spectrograph-detector units, cooling and computer, the instrument consists of the following components: an RS232 – Ethernet converter to establish communication to the master computer in the container, an EMC-filter and a DC/DC converter (VICOR). The instrument housing (ratopac PRO) is designed to reduce electromagnetic interference. This setup proved to be sufficient to pass the necessary electro-  
15 magnetic radiation test.

The main component of the container instrument is three Ocean Optics USB2000 spectrograph-detector units ( $90 \times 60 \times 35$  mm), one for each viewing direction. The spectrograph ( $F/\#=4$ ) is a crossed Czerny-Turner type, which reduces the required optical bench size. The spectrometers use plane diffraction gratings (Ocean Optics grating  
20 #7, 2400 gr/mm, holographic). The detector itself consists of a linear CCD array with 2048 pixels (SONY ILX511), providing a spectral resolution of 0.7 nm (FWHM). The three spectrometers are mounted in a separate air tight box to prevent condensation of water vapour and to increase temperature stability, since changes in the optical adjustment affect the spectral retrieval. Accordingly, the connections of the quartz fibre  
25 bundles to the spectrograph-detector units need to be airtight. For this purpose 1/4" cylindrical stainless steel end pieces were glued to each quartz fibre bundle. The cylindrical end pieces are the counterpart of 1/4" Swagelok Ultra Torr Adapters. In order to ensure the correct optical alignment of the quartz fibre bundle exit and the entrance

---

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



slit of the spectrographs, the fibre bundle end pieces and the Ultra Torr adapters are equipped with spanner flats, allowing only a connection in the correct position. The temperature control unit uses a PT100 sensor for measuring the optical bench temperature, an electronic temperature controller, and three Peltier elements inside the spectrograph box for cooling. The temperature was usually set to +18°C, compromising between reducing the dark current and occasional high ambient temperatures (exceeding +40°C).

The spectrograph-detector units are conveniently connected and supplied with power via USB ports of the measurement computer (96×116 mm, PC/104, 200 MHz processor type Geode GX1, 10 W). An active USB hub is employed to provide the necessary number of USB connections. A 1 GB flash memory card serves as hard drive and is used for data storage. The measurement software is run on Windows 2000. The remaining data storage space on the memory card corresponds to about 45 h of measurements. A set of monthly measurement flights (e.g. return flight to Santiago de Chile via São Paulo, Brazil) provides typically about 30 h of data, using a 30 s exposure time per spectrum. To attain a better signal-to-noise ratio, 5, 10 or 15 consecutive spectra were co-added after flight, resulting in time resolutions of 150, 300, or 450 s, corresponding to 39 km to 117 km of spatial resolution (along track).

The measurement software is fully automated and entirely controls the measurements once power is provided. It records scattered light spectra during daylight hours and background spectra during the night. It also establishes communication with the Master PC as required. Thereby, e.g. the PC time is synchronized. Since the DOAS instrument needs only little power, it is allowed to measure during ascent and descent, while larger power consumers in the container need to be switched off due to safety requirements.

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



### 3 Flight performance and data analysis

AMTD

2, 265–301, 2009

A total of 30 monthly flight operations from Frankfurt/Main were performed with the CARIBIC MAX-DOAS system from December 2004 to February 2008. Flight destinations were South America (Santiago de Chile via São Paulo, Brazil) and South-East Asia (Manila via Guangzhou, China). Also destinations in the US and India were visited. Some 40–60% of the flight time, depending on the season, was spent during daytime on these routes in 2005–2007. Since all respective flight legs over oceans and in the tropics took place at night time, DOAS data was collected over continents in mid-latitudes and the subtropics.

The deployed DOAS hardware proved to be suitable and reliable on these flights. However, during the course of measurement flights in 2005, the 10° up and 10° down viewing directions exhibited very low light intensities compared to the results of the very first measurement flight. This issue will be addressed separately in Sect. 3.1. The measurement software was updated several times to attain a higher stability and to include automated background measurements and a watchdog program. Occasionally, temperature instabilities caused by large changes in the ambient (container) temperature, in particular during landing and take-offs, led to shifts in the wavelength calibration of the spectrometer. However, this could mostly be corrected during the data analysis procedure. The overall flight performance proved regular DOAS measurements on long-distance flights to be very well feasible.

#### 3.1 Performance of the DOAS telescopes and fibre bundles

During 2005 the light sensitivity of the 10° up and 10° down viewing telescopes decreased and continued to be very low, sometimes even zero, so that until February 2008 data was mainly available from the nadir viewing direction only. Since tests showed that the container instrument could be excluded as an error source, the problem could only be addressed upon detachment of the inlet system. In January 2008, the inlet system had to be taken off as part of a major routine aircraft check. On this oc-

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



- casion the quartz fibre bundles and the telescope system were replaced. It turned out that the connection of the quartz fibre bundles to the telescope had become loose for the 10° up viewing direction and that the UG5 filter in the 10° down viewing telescope unit had been broken to pieces, either due to temperature stress or vibrations or both.
- 5 After the replacement the light intensity of all three viewing directions is satisfying. The telescope system was replaced without modifications, whereas the quartz fibre bundles were replaced by new ones, now consisting of 6 individual quartz fibres of 150 µm each and with a numerical aperture of 0.11 ( $f/4$ ) to better adjust to the specifications of the spectrograph-detector units. To prevent any quartz fibre bundles from becoming
- 10 loose again, the Ultra Torr Adapters were additionally secured with a silicone sealant applied to the outside of the connector.

As noted above, upon each measurement flight, the quartz fibre bundles are connected to the respective spectrograph-detector unit in the DOAS container instrument. This procedure implies a lot of handling, thus exposing the quartz fibre bundles to 15 a higher risk of breaking. However, until their renewal in January 2008 the bundles proved to be sufficiently robust: Merely two (one out of four individual fibres in two bundles) were broken during almost three years of flight time with a total of 30 install – uninstall cycles. It is fair to assume that the new cables will last for years.

### 3.2 Data analysis and detection limit

- 20 The WinDOAS software (Fayt and van Roozendael, 2001) was used for the DOAS data analysis. It performs a non-linear least squares fit by simultaneously adjusting the relevant atmospheric absorbers in the respective wavelength range to the measured spectra. To account for broad band effects largely caused by Rayleigh- and Mie scattering a polynomial of degree 2–5 is included. The fitting procedure was performed in optical 25 density space by taking the logarithm of the spectra. Before the logarithm is taken a linear intensity offset was included in each fitting process to account for instrumental stray light. The absorption cross section references used for data analysis are listed in Table 1. Each flight was evaluated with a Fraunhofer reference spectrum consisting

---

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



of 10 or 15 co-added spectra from the same flight to account for Fraunhofer absorption lines. Therefore measured slant column densities are differential Slant Column Densities (dSCDs). To account for the “filling in” of Fraunhofer lines due to rotational Raman scattering (“Ring effect”, Grainger and Ring 1962), a Ring reference spectrum was calculated from the respective Fraunhofer reference with the DOASIS software (Kraus, 2006). The analysis settings for each trace gas are summarised in Table 2. References in parentheses indicate that the particular trace gas reference was only fitted where applicable, e.g. during ascent and descent.

For the current instrumental setup, a realistic detection limit is estimated by twice the statistical error resulting from the fitting procedure (standard deviation  $\sigma$  of the optical density of the fit residual) (Stutz and Platt, 1996). This detection limit is valid for mostly unstructured residuals. Sensitivity studies have shown that some residuals contain systematic structures. However, for stable instrument conditions, high light intensities and a reference spectrum close in time to the analysed spectrum ( $<30$  min), the fit residuals were mostly unstructured. In this case  $\sigma$  was found to be  $5 \times 10^{-4}$  for a time resolution of 30 s and  $\sigma=3.2 \times 10^{-4}$  for a time resolution of 7.5 min (15 co-added spectra). Resulting detection limits are given in Table 2 expressed as dSCD<sub>limit</sub> for all trace gases. These limits appear to be realistic, since the scatter of the dSCD data is of the same order of magnitude. Shorter detector exposure times lead to higher photon noise, therefore, a 30 s integration time (and thus time resolution) can be regarded as rather good for scattered-light DOAS measurements, particularly when using a small Ocean Optics USB2000 spectrometer. It is therefore quite a success that many trace gases could be analysed above the detection limit even within the 30 s time resolution.

Examples for the spectral retrieval of NO<sub>2</sub>, HCHO and HONO are shown in Figs. 6 and 7. The analysis was performed using spectra with a 30 s time resolution taken from the nadir viewing direction, which applies to all results thereafter, except where stated otherwise. NO<sub>2</sub> and HCHO are measured during ascent in the polluted boundary layer of Guangzhou, China, while HONO was detected for the first time inside a deep convective cloud over central China (see Sect. 4). The evaluation of HONO was checked

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



particularly careful in this case to make sure that the observed absorption structure is real. (Observed deviations for different analysis settings were within 10%).

AMTD

2, 265–301, 2009

## 4 Exemplary results

The dSCD time series measured inside the aforementioned deep convective cloud on 5 1 August 2006 over central China ( $106.5^{\circ}$  E,  $27.1^{\circ}$  N, flight altitude = 11.4 km) is shown in Fig. 8. Shortly after 05:55 UTC a peak in all slant columns can be seen, except for BrO. The red box indicates the time period of the aircraft flying inside the cloud. Video recordings of the forward looking camera mounted in the pylon reveal that the aircraft travelled completely inside a large cloud during this period. This is further confirmed by 10 coincident high in-situ total water values (A. Zahn, personal communication, CARIBIC database). In this case the measured dSCDs are enhanced by multiple scattering inside the cloud as suggested by the peak in  $O_4$  column values.

The deep convective cloud is characterized by the presence of elevated levels of HONO,  $NO_2$  and HCHO. Simultaneously in-situ NO and  $NO_y$  peak (H. Ziereis, personal communication, CARIBIC database) and  $O_3$  and CO mixing ratios drop sharply 15 (A. Zahn, F. Slemr, D. Scharffe, personal communication, CARIBIC database), indicating the presence of a distinct air mass that had not yet been mixed with ambient air. Since inside the cloud in-situ  $O_3$  is lower and in-situ NO and  $NO_y$  are higher, it is safe 20 to assume that the  $O_3$  dSCD peak is merely caused by multiple scattering, whereas the HONO dSCD peak and possibly the HCHO peak are caused by an increased concentration.

Data of the World Wide Lightning Location Network (see <http://webflash.ess.washington.edu>) shows lightning activity in this area for the same period of time. It is thus likely that the observed HONO is formed in-situ by lightning induced OH and 25 NO, while elevated HCHO levels could be explained by either direct formation and/or reaction of OH with methane or by the concomitant updraft of polluted air through deep convection (e.g. Bhetanabhotla et al., 1985).

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Converting the HONO peak slant column density into a mixing ratio by means of radiative transfer modelling yields about 70 ppt HONO. For that purpose, modelled cloud properties were varied until measured and modelled O<sub>4</sub> SCDs agreed, in order to constrain the settings for the AMF calculations to convert the HONO SCD into a Vertical Column Density (VCD). The VCD was then converted into a mixing ratio by assuming a constant HONO mixing ratio within the cloud, therefore the given HONO mixing ratios should indicate the average over the cloud volume. These observations will be further discussed and published elsewhere.

Time series of the same trace gases during the traverse of a biomass burning plume are presented in Fig. 9. These data were recorded during a return flight between São Paulo and Santiago de Chile on 5 October 2005. Biomass burning signatures are marked with a red box. Enhanced slant columns of NO<sub>2</sub> and HCHO measured by DOAS coincide with high NO<sub>x</sub> (H. Ziereis, personal communication, CARIBIC database) and CO (F. Slemr, D. Scharffe, personal communication, CARIBIC database) mixing ratios observed by in-situ instruments. Combining these findings with trajectory studies, CO-O<sub>3</sub> correlations and aerosol measurement results can yield information on origin and age of the air mass(es). Furthermore, the flight track crossed massive clouds (information taken from ECMWF data, see [http://www.knmi.nl/samenw/campaign\\_support/CARIBIC](http://www.knmi.nl/samenw/campaign_support/CARIBIC)), coinciding with lightning activity (information taken from NASA's lightning imaging sensor (LIS, see <http://thunder.msfc.nasa.gov>) and a peak in the HONO slant column density. This is perhaps a similar finding to that over China, while the contribution of biomass burning NO<sub>x</sub> to the HONO formation is unclear.

Periods when the aircraft was flying in lower stratospheric air (in or just above the tropopause) are indicated by green boxes in Fig. 9. Higher slant columns of NO<sub>2</sub> and O<sub>3</sub> were indeed measured, as both trace gases exhibit maxima in the stratosphere. The “down welling” of the tropopause is caused by tropopause folding activity over the Andes, which is a common phenomenon in this region.

A similar, but more pronounced event is shown in Fig. 10, where simultaneously enhanced BrO, NO<sub>2</sub> and O<sub>3</sub> levels could be measured over the Tibetan Plateau by the

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



10° downward viewing direction on 1 August 2006 (red box). Because of the above mentioned reduced light gain of this viewing angle, spectra were co-added to yield a time resolution of 2 min and 12/20 min respectively to achieve a better signal-to-noise ratio. ( $O_3$  slant column densities are derived from the BrO analysis, as the spectra quality did not permit an analysis at shorter wavelengths, where the  $O_3$  absorption is 5 stronger.) Since the nadir viewing direction shows no elevated values for the respective trace gases during the same period, and as both viewing directions are similarly sensitive to the stratosphere, it can be safely assumed that the measured trace gases are located beneath the aircraft in the troposphere where the 10° viewing direction exhibits its highest sensitivity. The origin of this air mass is very likely stratospheric. In 10 Fig. 11 potential vorticity values for this flight over central Asia are plotted, indicating the course of the tropopause in yellow to red shading. A blue box encloses regions with elevated PV values in the troposphere (84.4°–105.2° E, 41.1°–29.5° N, flight altitude = 11.4 km), which are very probably remnants of a dissipated tropopause fold. Assuming 15 a cloud free atmosphere as judged from the camera data and  $O_4$  measurements, and averaging over 8 to 11 km altitude yields mixing ratios of about 6 ppt BrO, 0.5 ppb  $NO_2$  and 230 ppb  $O_3$  for the slant column density maxima at 04:15 UTC. The  $NO_2$  might be biased by a tropospheric background. However, this might largely be excluded for BrO since typical tropospheric mixing ratios are in the order of 0.6–3 ppt (e.g. Fitzenberger, 20 et al., 2000; Hendrick et al., 2007; Heys et al., 2007). The observed mixing ratio of 6 ppt BrO and particularly the high ozone mixing ratio support the assumption that this air mass originated in the stratosphere.

During ascent and descent of the aircraft, information on the local boundary layer is gained. An example for a boundary layer profile retrieval of  $NO_2$  during a descent in 25 Guangzhou, China on 1 August 2006 is given in Fig. 12.

The retrieval was performed using the well known optimal estimation method (Rodgers, 2000), where a best estimate of the vertical profile is determined using the measured SCDs, an a priori profile, and the Box-AMFs as weighting functions. The inversion algorithm is implemented in McArtim (Deutschmann and Wagner, 2008;

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Wagner et al., 2007), the successor of Tracy II (see above). This program was also used for the respective AMF modelling. In order to derive suitable Box-AMFs, a cloud free descent was chosen and the aerosol profile was constrained by modelling different aerosol scenarios until measured and modelled O<sub>4</sub> values agreed (for retrieving information of aerosol properties by O<sub>4</sub> measurements see e.g. Wagner et al., 2004; Wittrock et al., 2004; Sinreich et al., 2005; Frieß et al., 2006). SCDs from all viewing directions serve as input, with nadir SCDs contributing with a 30 s time resolution (corresponding to a 100–200 m height resolution), and both up and down viewing directions ( $\pm 10^\circ$ ) with a 2 min time resolution (corresponding to a 400–800 m height resolution).

The height of the boundary layer is about 2 km at 14:00 local time and it can be assumed to be well mixed. The retrieved profile in Fig. 12 shows a distinct shape, different from the a priori, and also exhibits smaller errors, which is an indication that most of the profile information is taken from the measurements. Therefore, profile inversion from CARIBIC DOAS measurements is a suitable concept. However, the facts that the nadir data contains very little vertical information and that data of the slant directions are of inferior quality limit the vertical resolution of the retrieved profile. Furthermore, the total descent inside the boundary layer averages over a 50 km distance to the airport. Retrieved concentrations are likely to be underestimated owing to horizontal inhomogeneities. Future sensitivity studies could provide insight on the effect of the spatial averaging of the approaching aircraft. The derived mixing ratio from this retrieval calculates to  $4.1 \text{ ppb} \pm 0.9 \text{ ppb}$  NO<sub>2</sub> for 0–1 km altitude.

## 5 Conclusions and outlook

The CARIBIC DOAS instrument performed reliably during 30 flight operations. Three years of continuous exposure of the telescope block inside the pylon to the almost daily harsh conditions of pressure changes, temperature variations, and changes from extreme tropical humidity to dry stratospheric air have been an ultimate test for the system: The connections between the quartz fibre bundles and the telescope block

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



have shown to be critical and the spectral filters are fragile. On the other hand, the quartz fibre bundles appear to be rather robust, even though they remain a critical part in this system. With respect to the overall flight performance, the following conclusions can be drawn:

- 5 – DOAS spectra could be recorded on each daytime flight.
- After software improvements, the DOAS instrument provides reliable and fully automated measurements of scattered light spectra during day and background spectra during night.
- 10 – The 30s time resolution is suitable for the analysis of most trace gases. It allows the resolution of unique events as shown by the detection of HONO in a deep convective cloud.
- 15 – With all three viewing directions operational – since February 2008, the CARIBIC DOAS has gained back its full spatial resolution, which will make measurements much more sensitive to trace gases in the free troposphere. On average the spatial resolution is 7-8 km along flight track (determined by aircraft velocity), with the highest sensitivities directly above and below the aircraft.

This novel instrumentation provides a multitude of interesting observations and can contribute to different scientific topics:

- 20 – CARIBIC DOAS measurements are well suited for tropospheric plume studies. Especially with the up and down viewing directions working again, the sensitivity to the troposphere and UTLS region is increased, and separation of stratospheric and tropospheric columns can be performed more precisely, which yields an improved quantification of tropospheric absorbers.
- 25 – CARIBIC DOAS measurements contain information on stratospheric trace gases and can possibly add insight to the question on the contribution of tropopause folds to troposphere-stratosphere exchange.

---

**AMAX-DOAS on  
CARIBIC flights**

B. Dix et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

- Upon ascent and descent of the aircraft, vertical information on the boundary layer is gained, yielding information on local pollution and with the potential for boundary layer profile retrievals.

AMTD

2, 265–301, 2009

A great potential of these measurements is that any single flight offers the possibility of unexpected findings. Continued work with the CARIBIC DOAS system will be based on making use of the newly gained spatial information and sensitivity by all viewing directions. Further studies will include a complete use of all current CARIBIC data, which can yield information on origin, age, and chemistry of different air masses, on sources and sinks of trace gases as well as on aerosol (optical) properties. A change of the spectrograph-detector unit would improve the overall sensitivity of the CARIBIC DOAS instrument and could enable the detection of IO, glyoxal and water vapour. Since the total CARIBIC project time is at least 10 years, statistical analysis of the dataset can provide valuable information on trends and anomalies in trace gas distributions.

*Acknowledgements.* We thank the CARIBIC team, particularly Dieter Scharffe, Franz Slemr, Claus Koeppel, Markus Hermann and Andreas Zahn.

Thank you to Tim Deutschmann for providing TRACY-2 und McArtim and thanks to Lufthansa and Lufthansa Technik for the ongoing good cooperation.

## References

- Acker, K., Möller, D., Weprecht, W., Meixner, F., Bohn, B., Gilge, S., Plass-Dülmer, C., and Berresheim, H.: Strong daytime production of OH from  $\text{HNO}_2$  at a rural mountain site, *Geophys. Res. Lett.*, 33, L02809, doi:10.1029/2005GL024643, 2006.
- Bogumil, K., Orphal, J., Homann, T., Voigt, S., Spietz, P., Fleischmann, O.C., Vogel, A., Hartmann, M., Bovensmann, H., Frerick, J., and Burrows J.P.: Measurements of molecular absorption spectra with the SCIAMACHY pre-flight model: Instrument characterization and reference data for atmospheric remote-sensing in the 230–2380 nm region, *J. Photoch. Photobio. A*, 157, 167–184, 2003.

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Brenninkmeijer, C. A. M., Crutzen, P., Boumard, F., Dauer, T., Dix, B., Ebinghaus, R., Filippi, D., Fischer, H., Franke, H., Frieß, U., Heintzenberg, J., Helleis, F., Hermann, M., Kock, H. H., Koeppel, C., Lelieveld, J., Leuenberger, M., Martinsson, B. G., Miemczyk, S., Moret, H. P., Nguyen, H. N., Nyfeler, P., Oram, D., O'Sullivan, D., Penkett, S., Platt, U., Pupek, M., Ramonet, M., Randa, B., Reichelt, M., Rhee, T. S., Rohwer, J., Rosenfeld, K., Scharffe, D., Schlager, H., Schumann, U., Slemr, F., Sprung, D., Stock, P., Thaler, R., Valentino, F., van Velthoven, P., Waibel, A., Wandel, A., Waschitschek, K., Wiedensohler, A., Xueref-Remy, I., Zahn, A., Zech, U., and Ziereis, H.: Civil Aircraft for the regular investigation of the atmosphere based on an instrumented container: The new CARIBIC system, *Atmos. Chem. Phys.*, 7, 4953–4976, 2007,  
<http://www.atmos-chem-phys.net/7/4953/2007/>.

Bhetanabhotla, M. N., Crowell, B. A., Coucovinos, A., Hill, R. D., and Rinker, R. G.: Simulation of trace species production by lightning and corona discharge in moist air, *Atmos. Environ.* 19, 1391–1397, 1985.

Bruns, M., Buehler, S. A., Burrows, J. P., Heue, K.-P., Platt, U., Pundt, I., Richter, A., Rozanov, A., Wagner, T., and Wang, P.: Retrieval of Profile Information from Airborne Multi Axis UV/visible Skylight Absorption Measurements, *Appl. Optics*, 43, 22, 4415–4426, 2004.

Brus, M., Buehler, S. A., Burrows, J. P., Richter, A., Rozanov, A., Wang, P., Heue, K. P., Platt, U., Pundt, I., and Wagner, T.: NO<sub>2</sub> Profile retrieval using airborne multi axis UV-visible skylight absorption measurements over central Europe, *Atmos. Chem. Phys.*, 6, 3049–3058, 2006,  
<http://www.atmos-chem-phys.net/6/3049/2006/>.

Deutschmann, T. and Wagner, T.: Tracyll and McArtim Documentation, [http://joseba.mpch-mainz.mpg.de/matr/tracy\\_ll/documentation/McArtim\\_Documentation.html](http://joseba.mpch-mainz.mpg.de/matr/tracy_ll/documentation/McArtim_Documentation.html) (last access: 2 February 2009), 2007.

Fayt, C. and van Roozendael, M.: WinDOAS 2.1. Software User Manual, 2001.

Fitzenberger, R., Bösch, H., Camy-Peyret, C., Chipperfield, M., Harder, H., Platt, U., Sinnhuber, B.-M., Wagner, T., and Pfeilsticker, K.: First profile measurement of tropospheric BrO, *Geophys. Res. Lett.*, 27, 2921–2924, 2000.

Frieß, U., Monks, P. S., Remedios, J. J., Rozanov, A., Sinreich, R., Wagner, T., and Platt, U.: MAX-DOAS O<sub>4</sub> measurements: A new technique to derive information on atmospheric aerosols: 2. Modeling studies, *J. Geophys. Res.*, 111, D14203, doi:10.1029/2005JD006618, 2006.

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



- Hendrick, F., Van Roozendael, M., Chipperfield, M. P., Dorf, M., Goutail, F., Yang, X., Fayt, C., Hermans, C., Pfeilsticker, K., Pommereau, J.-P., Pyle, J. A., Theys, N., and De Mazière, M.: Retrieval of stratospheric and tropospheric BrO profiles and columns using ground-based zenith-sky DOAS observations at Harestua, 60°N, *Atmos. Chem. Phys.*, 7, 4869–4885, 2007,  
5 <http://www.atmos-chem-phys.net/7/4869/2007/>.
- Heue, K.-P., Richter, A., Bruns, M., Burrows, J. P., v. Friedeburg, C., Platt, U., Pundt, I., Wang, P., and Wagner, T.: Validation of SCIAMACHY tropospheric NO<sub>2</sub>-columns with AMAXDOAS measurements, *Atmos. Chem. Phys.*, 5, 1039–1051, 2005,  
10 <http://www.atmos-chem-phys.net/5/1039/2005/>.
- Grainger, J. F. and Ring, J.: Anomalous Fraunhofer line profiles, *Nature*, 193, p. 762, 1962.
- Kleffmann, J., Becker, K., and Wiesen, P.: Heterogeneous NO<sub>2</sub> conversion processes on acid surfaces: possible atmospheric implications, *Atmos. Environ.*, 32, 2721–2729, 1998.
- Kraus, S.: DOASIS. A Framework Design for DOAS, Ph.D. thesis, University of Heidelberg,  
15 Germany, 2006.
- Lammel, G. and Cape, J. N.: Nitrous Acid and Nitrite in the Atmosphere, *Chem. Soc. Rev.*, 25, 361–369, 1996.
- Marquard, L., Wagner, T., and Platt, U.: Improved air mass factor concepts for scattered radiation Differential Optical Absorption Spectroscopy of atmospheric Species, *J. Geophys. Res.*, 20 105, 1315–1327, 2000.
- Meller, R. and Moortgat, G. K.: Temperature dependence of the absorption cross sections of HCHO between 223 and 323 K in the wavelength range 225–375 nm, *J. Geophys. Res.*, 105, 7089–7102, 2000.
- Perliski, L. M. and Solomon, S.: On the evaluation of air mass factors for atmospheric near-ultraviolet and visible absorption spectroscopy, *J. Geophys. Res.*, 98, 10363–10374, 1993.
- Platt, U. and Perner, D.: Direct Measurements of Atmospheric CH<sub>2</sub>O, HNO<sub>2</sub>, O<sub>3</sub>, NO<sub>2</sub> and SO<sub>2</sub> by Differential Optical Absorption in the Near UV, *J. Geophys. Res.*, 85, 7453–7458, 1980.
- Platt, U.: Differential Optical Absorption Spectroscopy (DOAS), in: Monitoring by Spectroscopic Techniques, edited by: Sigrist, M. W., John Wiley & Sons, Inc., New York, 1994.
- 30 Platt, U. and Stutz, J.: Differential Optical Absorption Spectroscopy. Principles and Applications, Springer-Verlag, Germany, 2008.
- Rodgers, C. D.: Inverse Methods for Atmospheric Sounding, Worlds Scientific, London, UK, 2000.

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Saiz-Lopez, A., Shillito, J. A., Coe, H., and Plane, J. M. C.: Measurements and modelling of I<sub>2</sub>, IO, OIO, BrO and NO<sub>3</sub> in the mid-latitude marine boundary layer, *Atmos. Chem. Phys.*, 6, 1513–1528, 2006,  
<http://www.atmos-chem-phys.net/6/1513/2006/>.

AMTD

2, 265–301, 2009

- 5 Simpson, W. R., von Glasow, R., Riedel, K., Anderson, P., Ariya, P., Bottenheim, J., Burrows, J., Carpenter, L. J., Frieß, U., Goodsite, M. E., Heard, D., Hutterli, M., Jacobi, H.-W., Kaleschke, L., Neff, B., Plane, J., Platt, U., Richter, A., Roscoe, H., Sander, R., Shepson, P., Sodeau, J., Steffen, A., Wagner, T., and Wolff, E.: Halogens and their role in polar boundary-layer ozone depletion, *Atmos. Chem. Phys.*, 7, 4375–4418, 2007,  
10 <http://www.atmos-chem-phys.net/7/4375/2007/>.

Sinreich, R., Frieß, U., Wagner, T., and Platt, U.: Multi Axis Differential Optical Absorption Spectroscopy (MAX-DOAS) of gas and aerosol distributions, *Faraday Discuss.*, 130, 153–164, 2005.

- 15 Solomon, S., Schmeltekopf, A. L., and Sanders, R. W.: On the interpretation of zenith sky absorption measurements, *J. Geophys. Res.*, 92, 8311–8319, 1987.

Stutz, J. and Platt, U.: Numerical Analysis and Estimation of the Statistical Error of Differential Optical Absorption Spectroscopy Measurements with Least-Squares methods, *Appl. Optics*, 35, 6041–6053, 1996.

- 20 Stutz, J. and Platt, U.: Improving longpath differential optical absorption spectroscopy with a quartz-fibre mode mixer, *Appl. Optics*, 36, 1105–1115, 1997.

Stutz, J., Kim, E., Platt, U., Bruno, P., Perrino, C., and Febo, A.: UV-visible absorption cross section of nitrous acid, *J. Geophys. Res.*, 105, 14858–14592, 2000.

- 25 Theys, N., Van Roozendael, M., Hendrick, F., Fayt, C., Hermans, C., Baray, J.-L., Goutail, F., Pommereau, J.-P., and De Mazière, M.: Retrieval of stratospheric and tropospheric BrO columns from multi-axis DOAS measurements at Reunion Island (21° S, 56° E), *Atmos. Chem. Phys.*, 7, 4733–4749, 2007,  
<http://www.atmos-chem-phys.net/7/4733/2007/>.

- 30 Vandaele, A. C., Hermans, C., Simon, P. C., Carleer, M., Colin, R., Fally, S., Merienne, M.-F., Jenouvrier, A., and Coquart, B.: Measurements of the NO<sub>2</sub> absorption cross-section from 42000 cm<sup>-1</sup> to 10000 cm<sup>-1</sup> (238 to 1000 nm) at 220 K and 294 K, *J. Quant. Spectrosc. Ra.*, 59, 171–184, 1997.

Volkamer, R., Sheehy, P. M., Molina, L. T., and Molina, M. J.: Oxidative capacity of the Mexico City atmosphere – Part 1: A radical source perspective, *Atmos. Chem. Phys. Discuss.*, 7,

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



von Glasow, R., von Kuhlmann, R., Lawrence, M. G., Platt, U., and Crutzen, P. J.: Impact of reactive bromine chemistry in the troposphere, *Atmos. Chem. Phys.*, 4, 2481–2497, 2004,  
5 <http://www.atmos-chem-phys.net/4/2481/2004/>.

Wagner, T., Dix, B., von Friedeburg, C., Frieß, U., Sanghavi, S., Sinreich, R., and Platt, U.: MAX-DOAS O<sub>4</sub> measurements: A new technique to derive information on atmospheric aerosols. Principles and information content, *J. Geophys. Res.*, 109, D22205, doi:10.1029/2004JD004904, 2004.

10 Wagner, T., Burrows, J. P., Deutschmann, T., Dix, B., von Friedeburg, C., Frieß, U., Hendrick, F., Heue, K.-P., Irie, H., Iwabuchi, H., Kanaya, Y., Keller, J., McLinden, C. A., Oetjen, H., Palazzi, E., Petritoli, A., Platt, U., Postylyakov, O., Pukite, J., Richter, A., van Roozendael, M., Rozanov, A., Rozanov, V., Sinreich, R., Sanghavi, S., and Wittrock, F.: Comparison of box-air-mass-factors and radiances for Multiple-Axis Differential Optical Absorption Spectroscopy (MAX-DOAS) geometries calculated from different UV/visible radiative transfer models, *Atmos. Chem. Phys.*, 7, 1809–1833, 2007,  
15 <http://www.atmos-chem-phys.net/7/1809/2007/>.

20 Wahner, A., Callies, J., Dorn, H.-P., Platt, U., and Schiller, C.: Near UV Atmospheric Absorption Measurements of Column Abundances During Airborne Arctic Stratospheric Expedition, Jan.–Feb. 1989: 1. Technique and NO<sub>2</sub> Observations, *Geophys. Res. Lett.*, 17, 497–500, 1990.

25 Wang, P., Richter, A., Bruns, M., Rozanov, V. V., Burrows, J. P., Heue, K.-P., Wagner, T., Pundt, I., and Platt, U.: Measurements of tropospheric NO<sub>2</sub> with an airborne multi-axis DOAS instrument, *Atmos. Chem. Phys.*, 5, 337–343, 2005,  
<http://www.atmos-chem-phys.net/5/337/2005/>.

30 Wang, P., Richter, A., Bruns, M., Burrows, J. P., Scheele, R., Junkermann, W., Heue, K.-P., Wagner, T., Platt, U., and Pundt, I.: Airborne multi-axis DOAS measurements of tropospheric SO<sub>2</sub> plumes in the Po-valley, Italy, *Atmos. Chem. Phys.*, 6, 329–338, 2006,  
<http://www.atmos-chem-phys.net/6/329/2006/>.

Wilmouth, D. M., Hanisco, T. F., Donahue, N. M., and Anderson, J. G.: Fourier transform ultraviolet spectroscopy of the A<sup>2</sup>Π<sub>3/2</sub><sup>-</sup> X<sup>2</sup>Π<sub>3/2</sub> transition of BrO, *J. Phys. Chem.*, 103, 8935–8945, 1999.

Wittrock, F., Oetjen, H., Richter, A., Fietkau, S., Medeke, T., Rozanov, A., and Burrows, J. P.:

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



---

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

**Table 1.** Trace gas references.

No.	Molecule	Reference
1	NO <sub>2</sub> (220 K)	Vandaele et al., 1997
2	NO <sub>2</sub> (294 K)	Vandaele et al., 1997
3	O <sub>4</sub> (298 K)	Hermans, 2002 <sup>1</sup>
4	BrO (228 K)	Wilmouth et al., 1999
5	HCHO (298 K)	Meller and Moortgat, 2000
6	HONO (294 K)	Stutz et al., 2000
7	O <sub>3</sub> (223 K)	Bogumil et al., 2003
8	O <sub>3</sub> (243 K)	Bogumil et al., 2003

<sup>1</sup> Hermans, C., personal communication, <http://www.aeronomie.be/spectrolab/o2.htm>, 2002

<a href="#">Title Page</a>	<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>	
<a href="#">Tables</a>	<a href="#">Figures</a>	
<a href="#">◀</a>	<a href="#">▶</a>	
<a href="#">◀</a>	<a href="#">▶</a>	
<a href="#">Back</a>	<a href="#">Close</a>	
<a href="#">Full Screen / Esc</a>		
	<a href="#">Printer-friendly Version</a>	
	<a href="#">Interactive Discussion</a>	



AMAX-DOAS on  
CARIBIC flights


B. Dix et al.

**Table 2.** Analysis settings and detection limits.

trace gas	wavelength range [nm]	fitted absorber	polynomial order	detection limit dSCD (30 s) [molec/cm <sup>2</sup> ]	detection limit dSCD (7.5 min) [molec/cm <sup>2</sup> ]
NO <sub>2</sub>	354–380	1,(2),3,7,8	3	$6.5 \times 10^{15}$	$4.2 \times 10^{15}$
O <sub>4</sub>	350–356	1,(2),3,7,8	2	$2.5 \times 10^{42}$	$1.6 \times 10^{42}$
BrO	345–360	1,3,4,7,8	2	$1.3 \times 10^{14}$	$8.0 \times 10^{13}$
HCHO	328–359	1,(2),3,4,5,(6),7,8	4	$1.8 \times 10^{16}$	$1.2 \times 10^{16}$
HONO	337–375	1,(2),3,4,5,6,7,8	4	$2.5 \times 10^{15}$	$1.6 \times 10^{15}$
O <sub>3</sub>	329.5–343	1,3,7,8	2	$2.5 \times 10^{18}$	$1.6 \times 10^{18}$

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



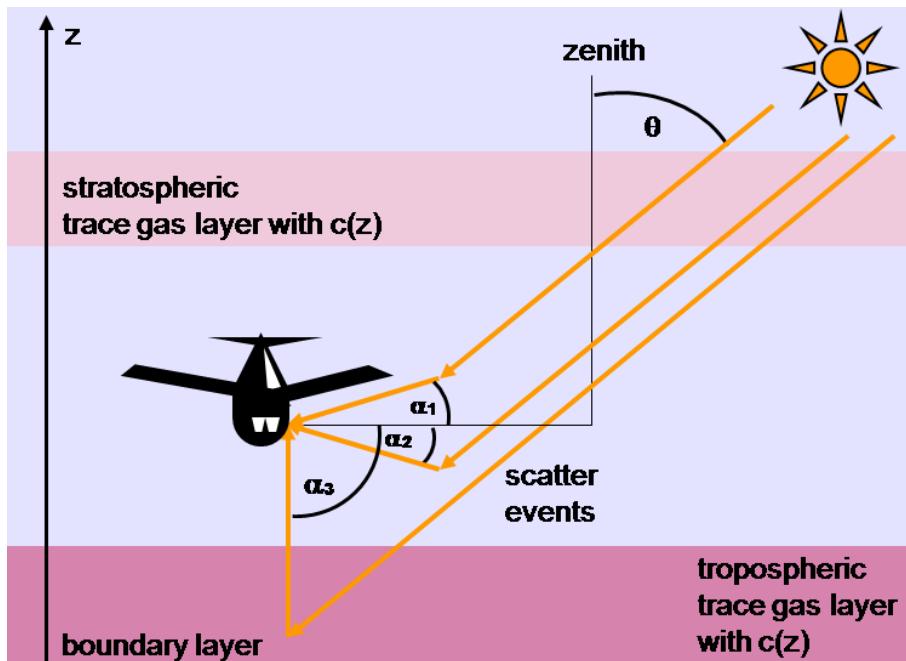

**Fig. 1.** Observation geometry of the CARIBIC DOAS measurement. Sunlight enters the atmosphere with the solar zenith angle  $\Theta$ . In a single scattering approximation, the measured photons are scattered once into one of the three detector viewing directions (nadir,  $\alpha_3=98^\circ$ ;  $10^\circ$  down,  $\alpha_2=10^\circ$ ;  $10^\circ$  up,  $\alpha_1=-10^\circ$ ), defined by the respective elevation angle  $\alpha$ .

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)



[Printer-friendly Version](#)

[Interactive Discussion](#)




AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

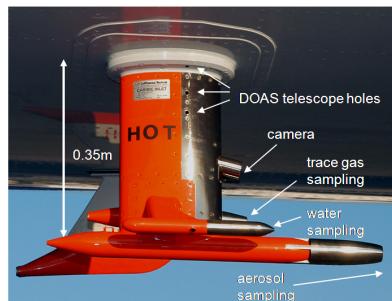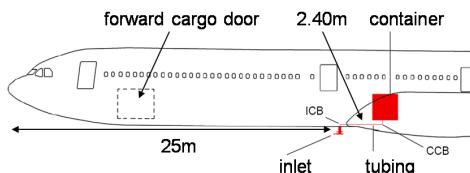

**Fig. 2.** Left panel: Sketch of the CARIBIC system, showing the position of the inlet system and the instrument container. ICB denotes “Inlet Connector Bracket”, CCB stands for “Container Connector Bracket”. ICB represents the airtight connection between the inlet sampling tubes and the connecting tubes inside the airplane, while the CCB houses all the necessary fittings for the connection to the container instruments. Adopted from Brenninkmeijer et al. (2007). Right panel: The pylon of the inlet system.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

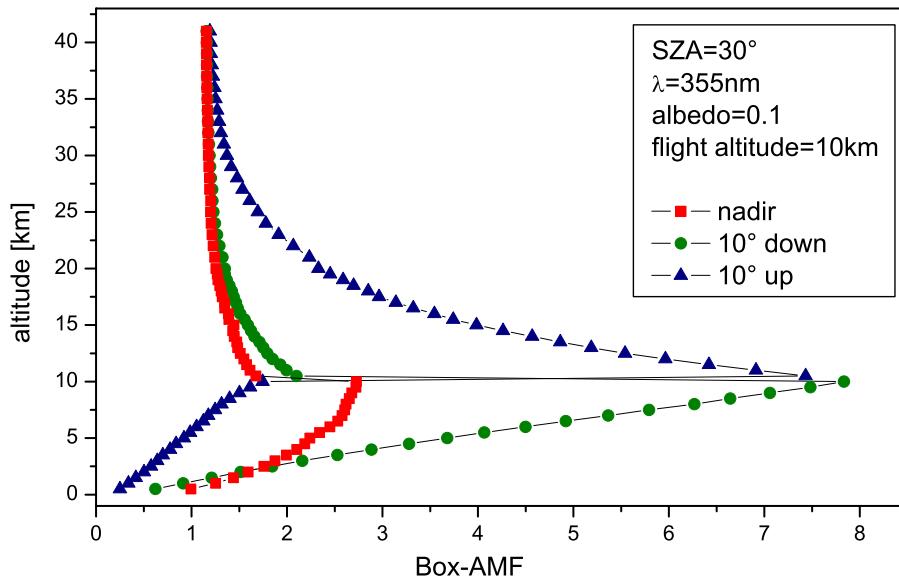

**Fig. 3.** Box-AirMassFactors (Box-AMFs) for the CARIBIC DOAS viewing geometries (nadir, 10° down, 10° up), calculated for a typical cruising height of 10 km and Solar Zenith Angle (SZA) and at a wavelength of 355 nm, which is suitable for most trace gases observed during the experiments.

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)


[Printer-friendly Version](#)

[Interactive Discussion](#)



AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

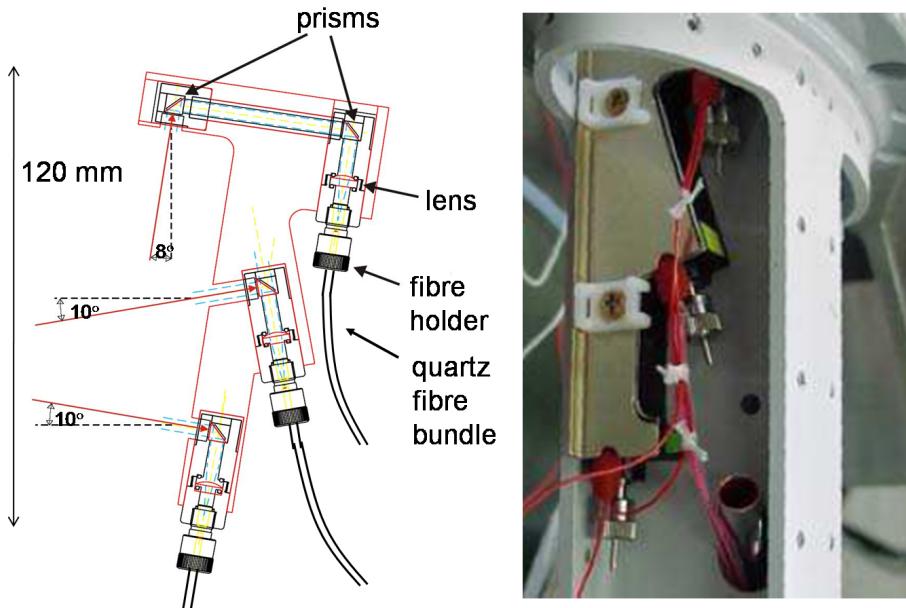


**Fig. 4.** Left panel: Sketch of the telescope block. The viewing directions (nadir,  $10^\circ$  down,  $10^\circ$  up) are indicated by red lines, dashed lines indicate horizontal and vertical directions, respectively. Note that the “nadir” telescope actually looks  $8^\circ$  to the right (as seen looking in flight direction) caused by a slightly tilted mounting of the inlet. Total length of the telescope block is 120mm. Right panel: The telescope block in the inlet during assembly. The Ultra Torr Adapters for the connection of the quartz fibre bundles (here shown plugged) as well as the red cables of the heating pads are visible.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

## AMAX-DOAS on CARIBIC flights

B. Dix et al.

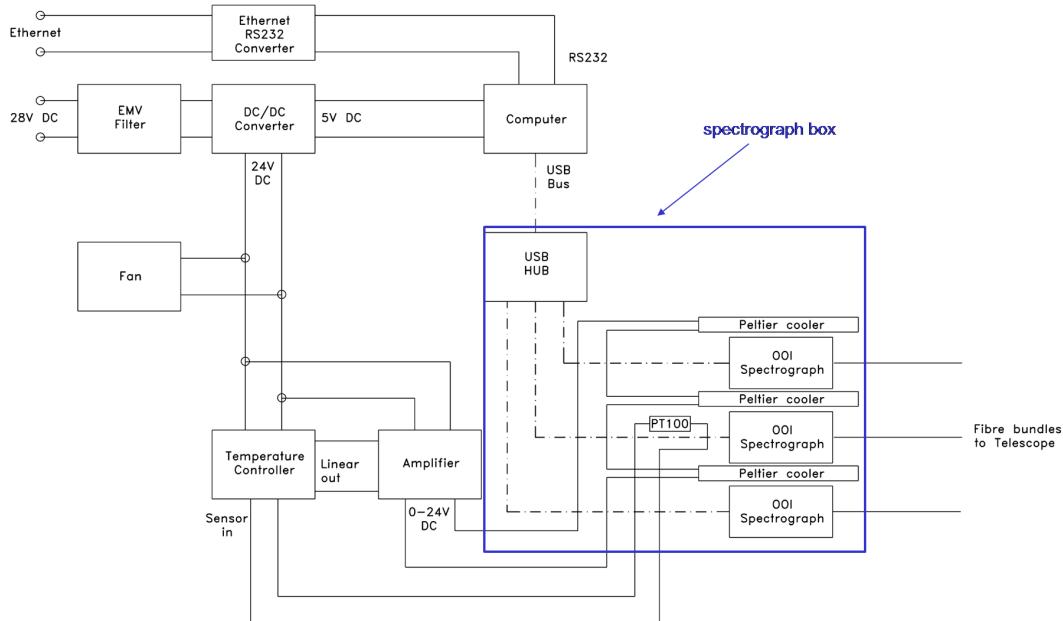

**Fig. 5.** Block diagram of the electrical connections within the DOAS container instrument.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)


[Printer-friendly Version](#)

[Interactive Discussion](#)



AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

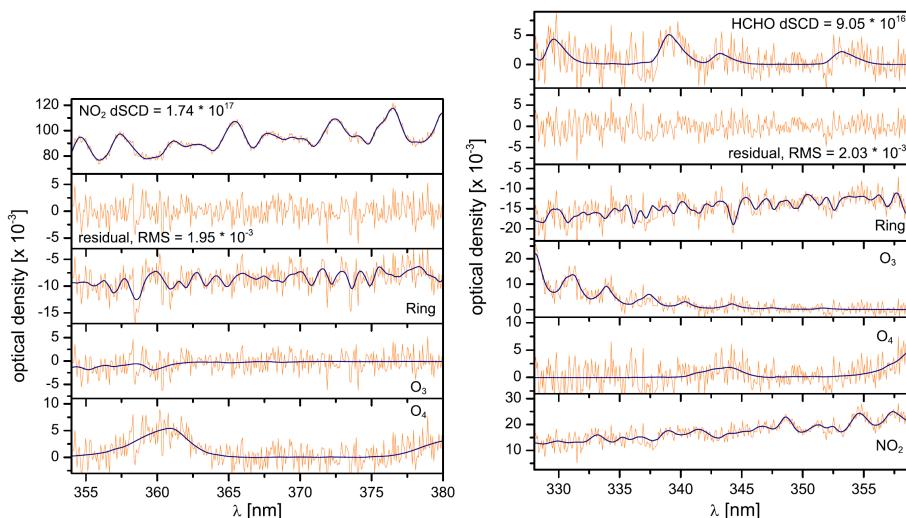


**Fig. 6.** Example for the spectral retrieval of  $\text{NO}_2$  (left panel) and  $\text{HCHO}$  (right panel) (both nadir). The black lines represent the fit results for the different trace gas cross sections; the orange lines show the residual structure added to the retrieved absorption structure. The analysis is performed on spectra recorded within the boundary layer upon landing in Guangzhou, China on 1 August 2006. The spectrum for the  $\text{NO}_2$  analysis is recorded at an altitude of 1.3 km with a SZA of  $34^\circ$ , that for  $\text{HCHO}$  at 1.7 km and SZA =  $33.8^\circ$  respectively. The reference spectrum is taken from the same flight at an altitude of 11.4 km with a SZA of  $17.6^\circ$ .

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

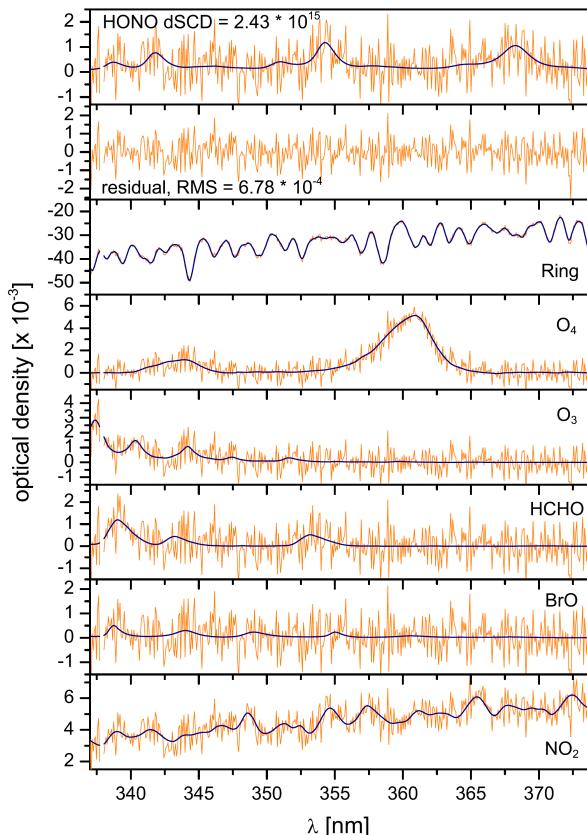


**Fig. 7.** Example of a spectral retrieval of HONO (nadir). The black lines represent the fit results for the different trace gas cross sections; the orange lines show the residual structure added to the retrieved absorption structure. The analysis is performed on a spectrum recorded inside a deep convective cloud on 1 August 2006 over central China ( $106.5^{\circ}$  E,  $27.1^{\circ}$  N) at an altitude of 11.4 km with a SZA of  $15.6^{\circ}$ . The reference spectrum is taken from the same flight and altitude with a SZA of  $17.6^{\circ}$  (see also Fig. 8).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

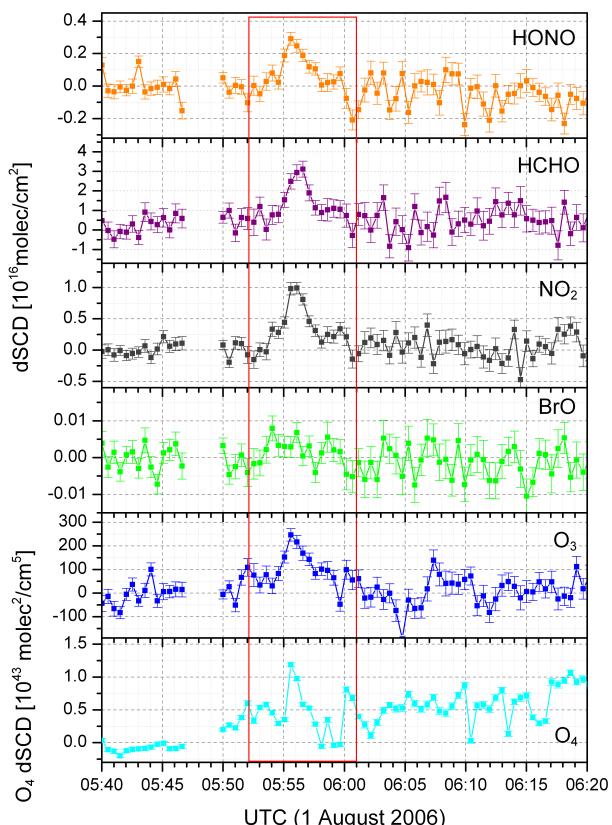


**Fig. 8.** DOAS results of measurements inside a deep convective cloud over central China on 1 August 2006 ( $106.5^\circ \text{ E}$ ,  $27.1^\circ \text{ N}$ ) at an altitude of 11.4 km with a SZA of  $15.6^\circ$ . The reference spectrum is taken from the same flight and altitude with a SZA of  $17.6^\circ$ . The time period of cloud interception is indicated by a red box. Inside the cloud, all trace gases show enhanced slant columns, except BrO.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

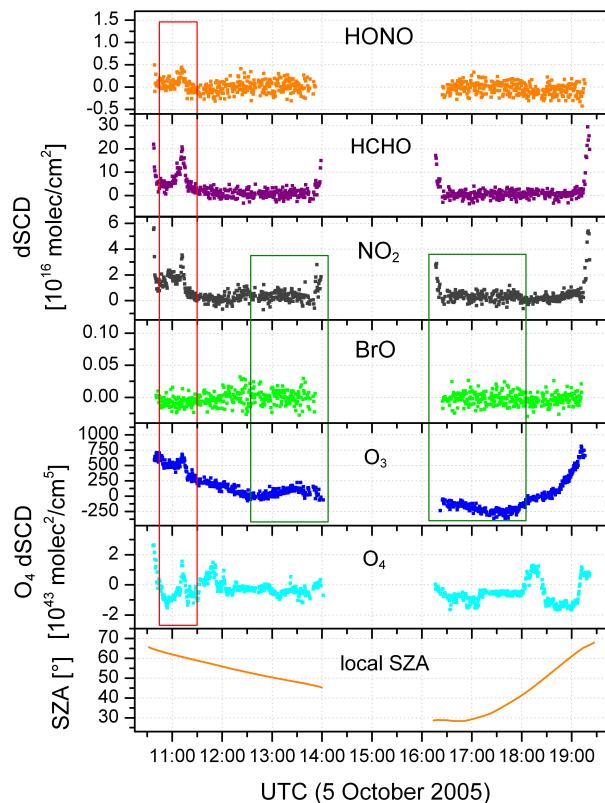


**Fig. 9.** DOAS results for a return flight from São Paulo to Santiago de Chile (left) and back (right). Biomass burning signatures are marked with a red box, while flying in stratospheric air is indicated by green boxes. The reference spectrum is recorded at 12:33 UTC.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

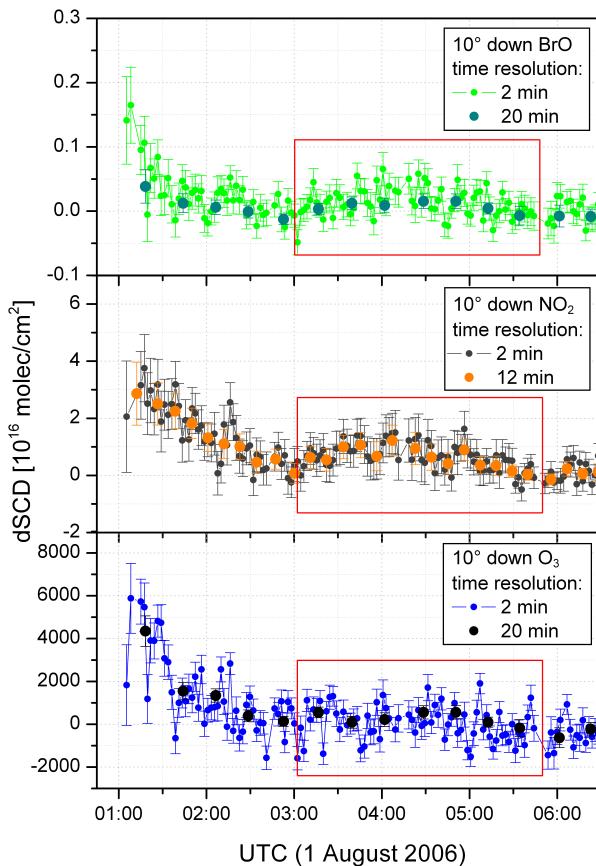


**Fig. 10.** BrO, NO<sub>2</sub> and O<sub>3</sub> dSCDs of the 10° down viewing direction for flight LH158 on 1 August 2006. The FRS is recorded at 04:48 UTC with a SZA of 15.8°. Higher slant columns between 01:00 and 03:00 UTC are caused by a rising sun and corresponding light path enhancements in the stratosphere. The red boxes mark episodes of elevated tropospheric BrO, NO<sub>2</sub>, and O<sub>3</sub>.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

AMAX-DOAS on  
CARIBIC flights

B. Dix et al.

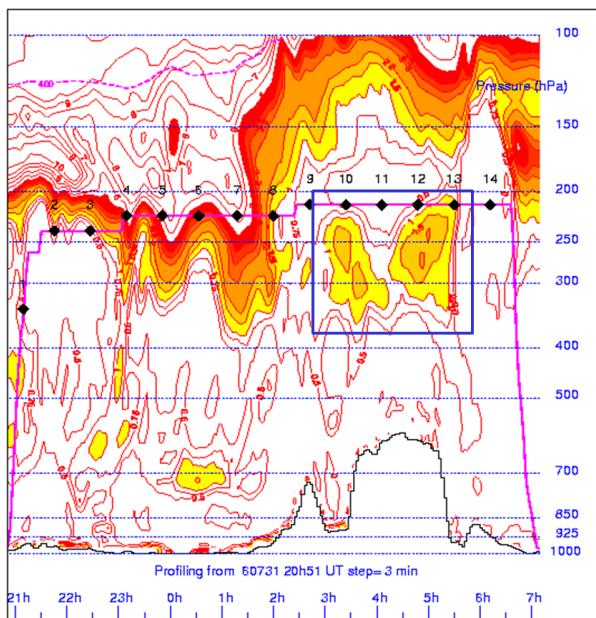


**Fig. 11.** PV values derived from ECMWF data for flight LH158 (provided by P. van Velthoven, KNMI, see [http://www.knmi.nl/samenw/campaign\\_support/CARIBIC](http://www.knmi.nl/samenw/campaign_support/CARIBIC), last access: 2 February 2009). The PV plot shows the flight track over the Tibetan Plateau and potential vorticity (red contours) with values between 1 and 5 PVU shaded from yellow to red. The blue box indicates elevated PV values in the troposphere, probably caused by a dissolved tropopause fold.

- Title Page      Abstract      Introduction  
Conclusions      References  
Tables      Figures
- |◀      ▶|  
◀      ▶  
Back      Close  
Full Screen / Esc
- Printer-friendly Version  
Interactive Discussion



**AMAX-DOAS on  
CARIBIC flights**

B. Dix et al.

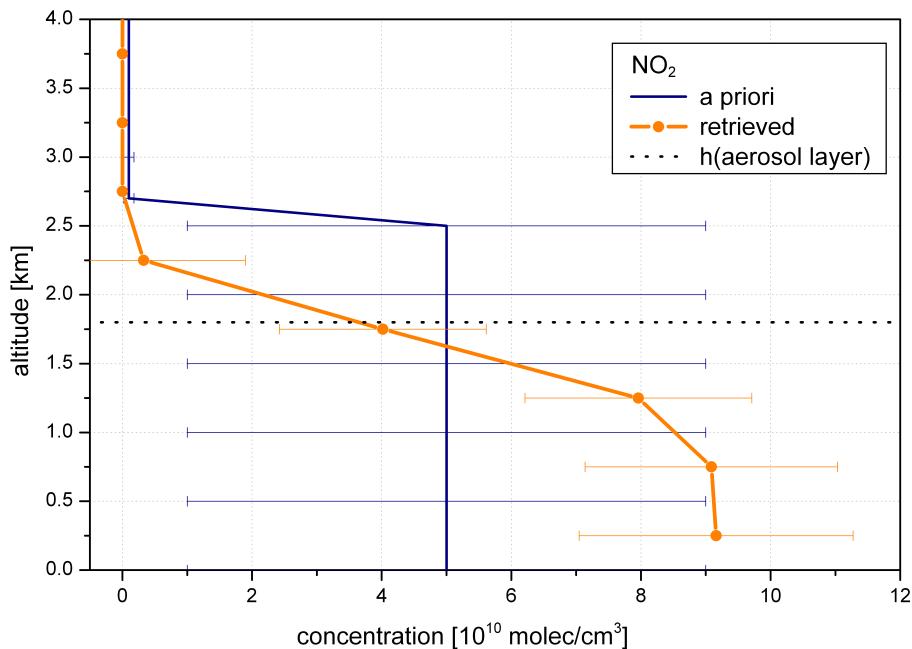

**Fig. 12.** NO<sub>2</sub> profile retrieved by optimal estimation method with a height resolution of 500 m. Data is taken from a descent in Guangzhou, China on 1 August 2006. The dashed line indicates the height of the aerosol box profile used in the retrieval.

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	

