



Perdigão 2015: methodology for atmospheric multi-Doppler lidar experiments

Nikola Vasiljević¹, José M.L.M. Palma², Nikolas Angelou¹, José Carlos Matos³, Robert Menke¹, Guillaume Lea¹, Jakob Mann¹, Michael Courtney¹, Luis Frölen Ribeiro⁴, and Vitor M.M.G.C. Gomes²

¹Technical University of Denmark - DTU Wind Energy, Frederiksborgvej 399, Building 118-VEA, 4000 Roskilde, Denmark

²Faculty of Engineering of the University of Porto, Rua Dr. Roberto Frias, 4200-465 Porto, Portugal

³Institute of Science and Innovation in Mechanical and Industrial Engineering, Rua Dr. Roberto Frias, 4200-465 Porto, Portugal

⁴Polytechnical Institute of Bragança, Campus de Santa Apolónia, 5300-253 Bragança, Portugal

Correspondence to: Nikola Vasiljević (niva@dtu.dk)

Abstract. The long-range and short-range WindScanner systems, multi-Doppler lidar instruments, can map the turbulent flow around a wind turbine and at the same time measure mean flow conditions over an entire region such as a wind farm. As the WindScanner technology is novel, performing field campaigns with the WindScanner systems requires a methodology that will maximize the benefits of conducting WindScanner-based experiments. Such a methodology is presented and discussed through its application in a pilot experiment that took place in a complex and forested site in Portugal where for the first time the two WindScanner systems operated simultaneously. The methodology consists of 10 steps. The steps are presented and the implementation of each step is demonstrated. Overall, the demonstration of the methodology in the pilot experiment resulted in a detailed site selection criteria, well-thought-out experiment layout, novel flow mapping methods and high quality flow observations, all of which are presented in this paper.

10 1 Introduction

In wind energy research, field experiments are important for wind resource evaluation but also to establish, validate and improve theories and wind flow models. If experiments are well planned, designed, executed and reported, the field datasets have a long lifetime and are a firm basis for the advancement of our knowledge on atmospheric flows.

15 A large number of field experiments addressing flows over hills (cf., Taylor et al., 1987) was carried out between 1979 and 1986. These field experiments provided the experimental validation of the models of the wind industry resource assessment (Jackson and Hunt, 1975; Mortensen et al., 2004; Walmsley et al., 1986). Among the field experiments of the past, the Askervein hill experiment (Taylor and Teunissen, 1987; Walmsley and Taylor, 1996) is as an example of a field campaign which dataset is still in use more than 30 years after. The increased computational power and developments in both numerical techniques and implementation of the flow physics have enabled the use of computational fluid dynamics and mesoscale models at a larger
20 scale, which call for validation with new field experiments. The need for new and higher quality field datasets, recognized



Figure 1. DTU Wind Energy scanning lidars. Long-range WindScanner (left); Short-range WindScanner (right)

in various wind energy related forums (e.g., EWEA, 2005, 2008; Shaw et al., 2009; van Kuik et al., 2016), is driven by the increasing size of the modern wind turbines often located in complex orographies.

Due to the costs of tall meteorological masts, especially in complex terrain, it is unrealistic to sample the wind with traditional anemometry within the region occupied by today's largest wind turbines. Recent efforts put into the WindScanner.dk project have resulted in two multi-Doppler lidar instruments, known as the long- and short-range WindScanner systems (Mikkelsen, 2014). These instruments unlocked the potentials not only to economically measure the wind field at a single point located within the rotor swept area, but also to map entire wind fields within the volume occupied by modern wind turbine and wind farms. As the WindScanner systems are a novel wind measurement technology there is an increased chance of misconducting experiments, therefore not producing expected results. In order to maximize the benefits of using the WindScanner technology, there is a need to establish a methodology for multi-Doppler lidar based atmospheric experiments.

In this paper, we propose such a methodology. The methodology will be discussed through its application to a pilot experiment that took place in a complex and forested site in Portugal. The paper is organized as follows: Section 2 describes the WindScanner systems, Section 3 and Section 4 present the methodology and a detailed description of how it was applied, the results of the methodology demonstration and future work are presented in Section 5, while Section 6 provides the concluding remarks.

2 WindScanner systems

A WindScanner system consists of two or more spatially separated scanning lidars (long- or short- range WindScanners, Figure 1) that are coordinated or controlled by a master computer. The first generation of the long-range WindScanner (LRWS) and short-range WindScanner (SRWS) originate from commercially available vertical profiling lidars Windcube 200 and ZephIR, respectively. Under the WindScanner.dk project, DTU Wind Energy, with the expert support from specialized industrial partners, developed scanner heads, converting the profiling lidars into the scanning lidars that make up the LRWS and SRWS.

The WindScanners have been specifically tailored to perform user-defined and time-controlled scanning trajectories, known as complex trajectories, either independently or in a synchronized mode. A single LRWS can acquire radial velocities simul-



Table 1. WindScanners' characteristics overview

	Long-range WindScanner	Short-range WindScanner
Technology	Pulsed	Continuous wave (CW)
Range (m)	50 to 8000	10 to 150
Maximum measurement rate (Hz)	10	400
Range gates per LOS	500	1
Probe length (m)	25, 35 or 70 (fixed with range)	0.2 to 40 (evolving with range)
Scanner head	Triple-mirror based gear-box driven	Double-prism based belt driven
Atmospheric coverage	Hemisphere	120° cone
Weight (kg)	180	300
Peak power consumption (kW)	1.7	2.4
Environment protection	IP65	IP62
Temperature range (°C)	-10 to 40	-10 to 40

taneously at a maximum 500 different distances along each line-of-sight (LOS) at a maximum rate of 10 Hz, whereas a single SRWS can measure radial velocity from one single range at a time but with a maximum rate of 400 Hz. A summary of the characteristics of the two types of WindScanners is given in Table 1.

The lidars in the long-range WindScanner system are usually connected to the master computer using a 3G network (Vasiljević et al., 2016b). The short-range WindScanner system is formed by connecting the master computer with the lidars via a 300-meter long optic fiber, controlling them using a MACRO (Motion and Control Ring Optical) digital interface (see Delta Tau).

The long-range WindScanner system is intended for measurements of mean flow field within a large volume of the atmosphere, while the short-range WindScanner system is typically applied to perform small-scale measurements of turbulent flows around a single wind turbine rotor. The long-range WindScanner system (Vasiljević, 2014b; Vasiljević et al., 2016a) has been in operation since 2013 (Berg et al., 2015; Floors et al., 2016), whereas the short-range WindScanner has been in operation since 2011 (Sjöholm et al., 2014; Lange et al., 2016). The campaign Perdigão-2015, described in the present paper, was the first time both long- and short-range WindScanner systems were operated simultaneously with an aim of combining them into a hybrid WindScanner system.

15 3 Methodology

The methodology for WindScanner-based experiments consists of 10 steps: (1) definition of scientific objectives; (2) site selection; (3) site characterization; (4) experiment layout design; (5) scanning modes design; (6) infrastructure planning; (7) deployment and calibration; (8) execution and data collection; (9) decommissioning and post-calibration; and (10) data archiving and dissemination.



Defining scientific objectives is related to outlining scientific questions of interest that can be addressed with WindScanners' observations. According to the scientific objectives, the site selection is made, followed by a detailed site characterization (e.g., wind conditions, terrain). Sometimes the order is reversed, a known site can stimulate a scientific question.

In the following steps, the experiment layout is made and physical infrastructure planned (e.g., power, network, access roads).
5 Afterwards, given the now established logistical constraints, scanning modes to be implemented during the campaigns are designed. Once the physical installation commences, the deployment and calibration procedural steps are applied (e.g. leveling and orientation of WindScanner, assessment of pointing accuracy). Following the start of the campaign the execution and data collection procedural steps are put in action (e.g., experiment monitoring and information logging). The decommissioning and post-calibration procedural steps are applied at the end of the campaign. In the last procedural step, all the information
10 regarding the campaign are collected together with the acquired datasets, and uploaded to an on-line information system (e.g., web site/server), making them available for end-users.

The aforementioned steps will be demonstrated in the content of Perdigão-2015 experiment in the following section.

4 Perdigão 2015 implementation of methodology

There were multiple reasons in favor of Perdigão-2015 experiment: there was the need to test both the equipment and our
15 human resources in a highly demanding field experiment. The question was whether the new scientific equipment, which is expensive, fragile and sensitive, and developed and tested previously in laboratory environment or in short-duration field campaigns was robust enough to stand very harsh conditions; for instance, high temperatures and remote locations with no power or network grid. The equipment, travelled on road, back and forth, between Roskilde (Denmark) and Serra do Perdigão (Portugal) and stayed in the mountains without surveillance for long periods.

20 WindScanner.eu (2012–2015), an European Union project of the ESFRI (European Strategy Forum on Research Infrastructures) program, under which a 3-year preparatory phase was financed for establishing a pan-European research infrastructure. Among the project deliverables, the methodology for WindScanner-based field experiments (which we report in the present manuscript) was developed based on the previous extensive work done under the WindScanner.dk project (see Vasiljević et al., 2016a; Sjöholm et al., 2014). The methodology was brought into test and further improved in a campaign held in Kassel
25 (Germany) during the summer of 2014 (Pauscher et al., 2016; Vasiljević et al., 2016a).

It was only in January 2015 decided to go ahead with Perdigão-2015, a last WindScanner demonstration field campaign within the WindScanner.eu project that would be the preparation of the larger field campaign at the same site in 2017, within the larger European project NEWA (New European Wind Atlas Mann et al., 2017). Perdigão-2015 took place during the summer of 2015, from May 4 until June 29.



30 4.1 Step 1: definition of scientific objectives

Besides the WindScanner.eu project, Perdigão-2015 was funded by NEWA, Unified Turbine Testing (UniTTe), and Optimizing layouts for wind farms in complex terrain (FarmOpt) projects. The later three projects have specific research goals that assisted in defining scientific objectives for Perdigão-2015.

The NEWA project aims to improve wind resource modeling for different site conditions. Areas with steep ridges and forested terrain are of particular interests, since the current engineering (linear) flow models are unable to correctly predict behavior of the flow over the sites with these features (Palma et al., 2008). The UniTTe project is focused on improving
5 international standards for characterizing the wind power and load measurements of wind turbines on various sites (e.g., flat and complex terrain) by substituting mast-based measurements with measurements derived by nacelle-mounted lidars measuring usually close to the turbine rotor. To fulfill the project's ambition, it is necessary to investigate how the incoming flow is modified by a wind turbine. The objective of the FarmOpt project is to develop numerical tools for wind farm layout optimization in complex terrain. For the purpose of these tools it is necessary to adequately model the wind turbine wake in
10 complex terrain. To address the aforementioned scientific questions all three projects, thus NEWA, UniTTe and FarmOpt, call for wind field measurements in complex terrain, preferably measurements of both mean and turbulent characteristics of the flow field. Perdigão-2015 offered the opportunity to acquire such measurements.

For Perdigão-2015, we selected several flow aspects to investigate and addressed them with WindScanner measurements. To assist the NEWA project, we chose to measure wind resources along a ridge, occurrences of flow separations on lee sides
15 of hills (i.e. recirculation zone) and valley flows. For the FarmOpt project we intended to characterize a single wind turbine wake in horizontal and vertical planes. Specifically, we aimed to provide measurements for studying the wind speed deficit up to five diameters downstream of the wind turbine, the wake position in a vertical plane close to the wind turbine, and the wake geometry in a horizontal plane with centre at the wind turbine hub. Similarly, for the UniTTe project, the inflow conditions were intended to be characterized in the same planes. The objective was to derive datasets for a detailed investigation of the wind
20 turbine induction zone in complex terrain. The ultimate objective was to create a dataset that could be used in the appraisal and development of computational models for wind resource, wind turbine design and wind farm layout optimization in complex terrain.

4.2 Step 2: site selection

According to the scientific objectives, the site of interest should be in a terrain consisting of a hill with a steep ridge where an
25 isolated wind turbine is operating. The site complexity should be under manageable levels, i.e. yielding a flow complexity that we can still understand. The hill size should be such that the flow clearly separates. Ideally, the hill should be in an environment surrounded by flat terrain, on which a well-defined flow would impinge, providing clear boundary conditions. Providing that this requirement is almost never met in nature, realistically, the surrounding terrain's complexity should be significantly lower than the selected site's complexity. A quasi two-dimensional, or a long ridge hill is a logical choice, and to assure a two-
30 dimensional flow, dominant winds should be perpendicular to the ridge. Land cover, particularly forests would add to the flow

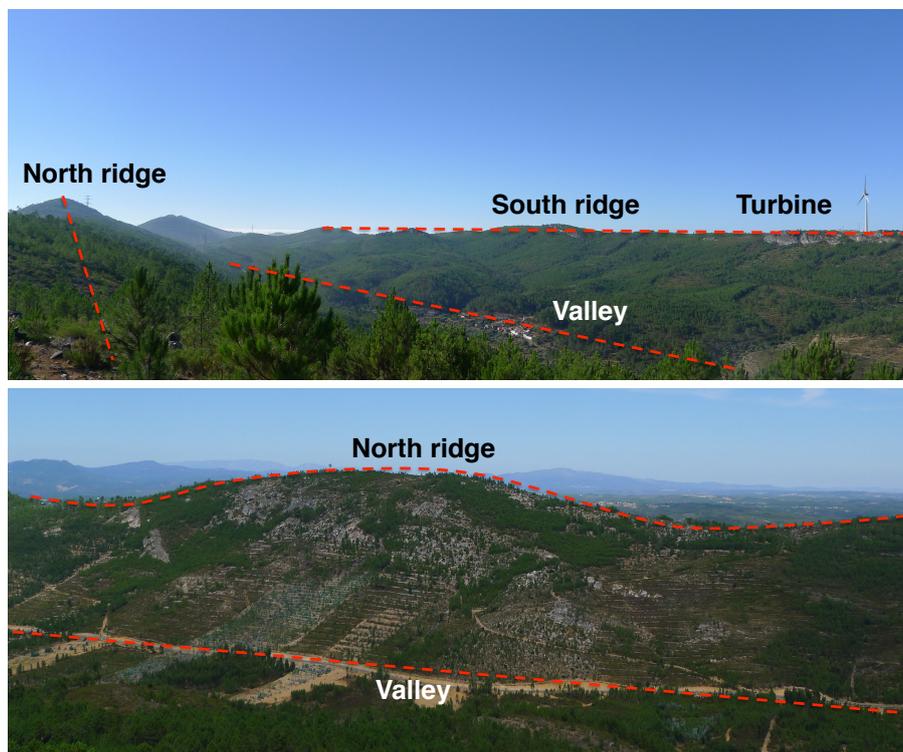


Figure 2. Perdigão site in September 2014 (see Vasiljević, 2014a). Views from the North ridge (top image) and South ridge (bottom image).

complexity, and is considered desirable, since many wind farms are installed near or within forested regions. According to this criteria the Perdigão site was selected. The presence of a wind turbine at the site gave the opportunity for wake and inflow measurements.

It should be noted that the site selection is typically made considering specific criteria or the site itself triggers ideas for experiments. In case of the Perdigão site, it was both. In 2009, the site visit initiated the idea for a double-hill experiment. In 2014, due to the presence of the wind turbine the site became an eligible location for a measurement campaign addressing the wake and inflow conditions of wind turbines in complex terrain.

5 4.3 Step 3: site characterization

Perdigão (Figure 2) is formed by two parallel ridges, with Southeast-Northwest orientation and distanced circa 1.4 km, that measure about 4 km lengthwise and are 500-550 m above sea level (asl) at their summits. The valley-to-peak height is about 200 to 250 m and the hills are steep, with an inclination of approximately 35 %. A double ridge in comparison to a single ridge site provides a list of additional advantages, because the lee side flow is also the flow impinging on the second ridge.

10 Furthermore, the lee side of the first hill and the upwind side of the second hill, make up the valley flow. The terrain coverage is irregular, made of no or low height vegetation and forests patches of eucalyptus and pine trees. Southwest and Northeast from



the ridges the terrain flattens somewhat providing an environment that to a first approximation can provide definable inflow conditions. An Enercon E-82 2 MW operating wind turbine is located on the South ridge (Figure 2).

Perdigão is an ideal site in terms of the orography and main road access, but with a difficult access to the ridges. The access to ridges is mostly through low-maintained, steep and narrow unpaved roads, which creates a difficulty for the equipment installation. Also, the site is located in a remote area, outside of the main urban areas with no power or data network. During late springs and summers, the temperatures are above 30°C which imposes challenge for field work. Overall, Perdigão provided a unique and demanding environment both for the selected scientific instrumentation, which is sensitive and prone to malfunctions, and personnel.

The site orography and canopy were mapped in March 2015 during a helicopter laser mapping mission. The area of 20 km² was scanned showing a density of about 40 points per square meter. Orthophotos with the resolution of 5 and 20 cm of the same area were acquired along with the derived point cloud. Wind measurements from the site were available from a 40-m met mast (INEGI, 2005) from Jan 2002–Dec 2004 (3 years, Table 2), with 88% availability at location 33997 Easting, 3529 Northing and an altitude of 489 m asl at 3 heights above ground level (agl). The predominant winds were from Northeast and West/Southwest directions (Figure 3), i.e. perpendicular to the ridges, with a mean and a maximum wind speed of around 6 m/s and 20 m/s (Table 2 and Figure 3). These directions are also those with highest average velocity (Figure 3) and lowest levels of turbulent intensity.

Table 2. Wind characteristics (Jan 2002 – Dec 2004)

Height (a.g.l.) [m]	10	20	40
Measured days	1096	1096	1096
<i>– Wind speed –</i>			
Mean (m/s)	5.0	5.0	5.8
Max (m/s)	24.8	23.8	22.8
<i>– Turbulence intensity –</i>			
$V > 5$ m/s (%)	10.0	8.9	9.1
$14 < V < 15$ m/s (%)	8.5	7.7	8.6
<i>– Weibull parameters –</i>			
A (m/s)	5.6	6.3	6.5
k	1.8	2.0	2.0

5 4.4 Step 4: experiment layout design

Computer simulations (Gomes, 2011) based on the VENTOS[®] (Castro et al., 2003) code of the flow over Perdigão were of importance while designing the experiment layout. VENTOS[®] is a dedicated CFD code for solving ABL flows over complex terrain, based on the elliptical RANS equations and the k - ϵ model for turbulence closure. The flow domain is described with a terrain-following structured mesh, with the bottom boundary modeled as a rough surface wall, classic inlet and outlet boundary

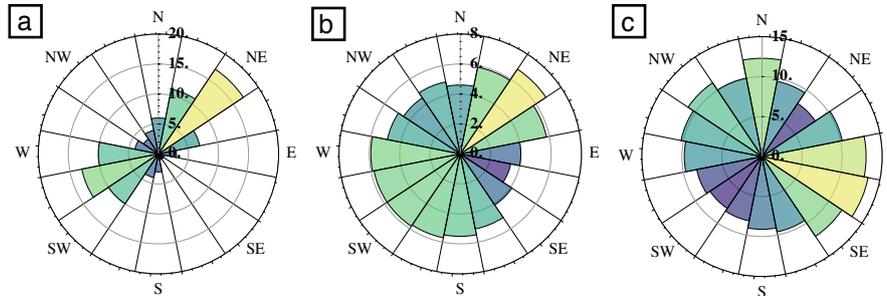


Figure 3. Wind regime at met mast station for 3-year period at 40 m agl: (a) wind direction (%); (b) wind speed (m/s); (c) turbulence intensity (%)

10 conditions, symmetry condition imposed at the lateral boundaries and a zero-shear condition for the top boundary. The terrain map of Perdigoão was sourced from SRTM data (90 m×90 m local horizontal resolution) combined with 10m resolution height contour chart data closer to the site. Domain meshes covering a 20 km×20 km area around the site were produced, discretized using a grid of 100×100 nodes measuring a minimum of 20 m×20 m at the meteorological mast position of previous wind resource studies (Table 3). Domain ceiling was set at 3000 m asl, discretized with 60 nodes, the smallest at 2 m high at the
15 ground surface. No canopy areas were considered. The solution was obtained using steady state formulation for the equations, and the model's wall boundary parameters were calibrated to yield wind speeds of 5–6 m/s at the South ridge under Southwest winds, with a surface characteristic roughness z_0 set to 0.03, friction velocity u_* to 0.23 m/s. The simulations of the flow from the Northeast and Southwest predict a high complexity of the flow (Figure 4), and large recirculation zone enclosed in the valley (Figure 5).

20 The two WindScanner systems, comprised a total of six scanning lidars: three LRWSs named Whittle, Koshava and Sterenn, and three SRWSs, named R2D1, R2D2 and R2D3. The lidar locations were selected according to the aim to sample the flow field along the South ridge and within the transect perpendicular to the ridges entailing the wind turbine (Figure 6 and Table 3). The previously acquired point cloud and orthophotos assisted in choosing the most accessible locations for the WindScanners' installation.

25 Whittle was located on the South ridge next to the wind turbine, and Koshava and Sterenn were located on the North ridge (Figure 6a). The distance from Whittle to Koshava and from Whittle to Sterenn was about 1.5 km, while the distance between Koshava and Sterenn was about 1.2 km. The three SRWSs were located on the South ridge close to the wind turbine (Figure 6b). R2D1 and R2D3 close to the access road, 52 m Southeast and 45 m Northwest of the wind turbine respectively, and R2D2 42 m Northeast of the wind turbine, down the slope of the South ridge (Table 3 and Figure 6b).

30 4.5 Step 5: infrastructure planning

The field campaign's control centre, consisting of the LRWS and SRWS master computers, data processing computer, network appliances, WiFi antennas, security camera and a small work space was installed in an office container, 20 m Northeast from

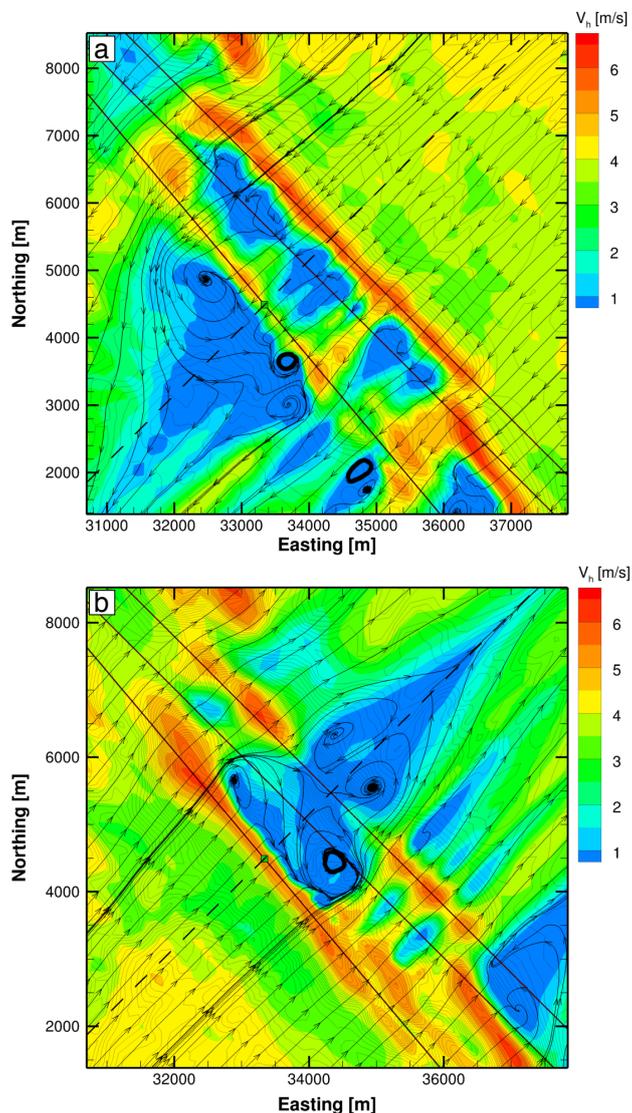


Figure 4. Wind flow in surface 80 m agl: (a) Northeast winds; (b) Southwest winds. Positions expressed in datum ETR89/PTM06 (m).

the wind turbine. Power and Internet connections were provided from the wind turbine substation by pulling 200 m long power and fibre-optic cables from the substation to the control centre, from which the wired power and Internet connections were further distributed to the nearby WindScanners. For network redundancy, secondary Internet connection for all devices was provided via mobile network connections. For the uninterrupted communication and power of Koshava and Sterenn on the opposite (North) ridge, two unidirectional WiFi links from the control centre were configured and a power container located on the Northeast slope of the North ridge approximately 1 km from each lidar unit (Figure 6). The power container, included two diesel generators and a fuel tank large enough for one week operation without refueling. At any moment, only one diesel

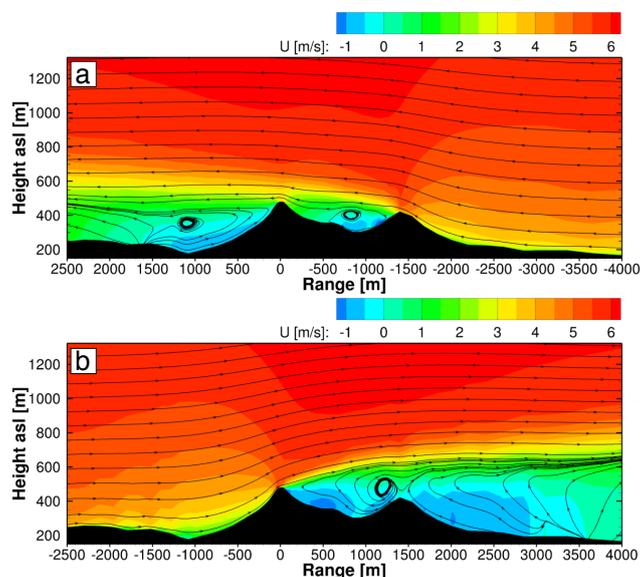


Figure 5. Wind flow in a vertical plane indicated with the dashed line in Figure 4: (a) Northeast winds; (b) Southwest winds. Coordinate system origin corresponds to wind turbine base.

Table 3. Position of instruments and landmarks given in datum ETR89/PTM06 (m)

Landmark	Easting [m]	Northing [m]	Height [m]
Koshava - LRWS	34793.95	4806.36	450.15
Sterenn - LRWS	33983.37	5722.43	443.71
Whittle - LRWS	33298.12	4430.08	485.58
R2D1 - SRWS	33282.19	4491.10	486.19
R2D2 - SRWS	33327.27	4437.05	474.83
R2D3 - SRWS	33285.10	4393.12	487.27
Wind turbine	33285.16	4438.44	484.01
Calibration pole	33314.46	4433.14	487.01
Telecom tower	33287.29	4411.11	502.70
Power tower	34791.18	4820.50	512.30

generator was operational, while the second one served as a fallback solution. The WindScanner locations were prepared by the local municipality to ensure a well-leveled base for the deployment. It should be noted that without the local support achieving
 5 the aforementioned experiment layout would be almost impossible (see Vasiljević, 2015a, for more details) .

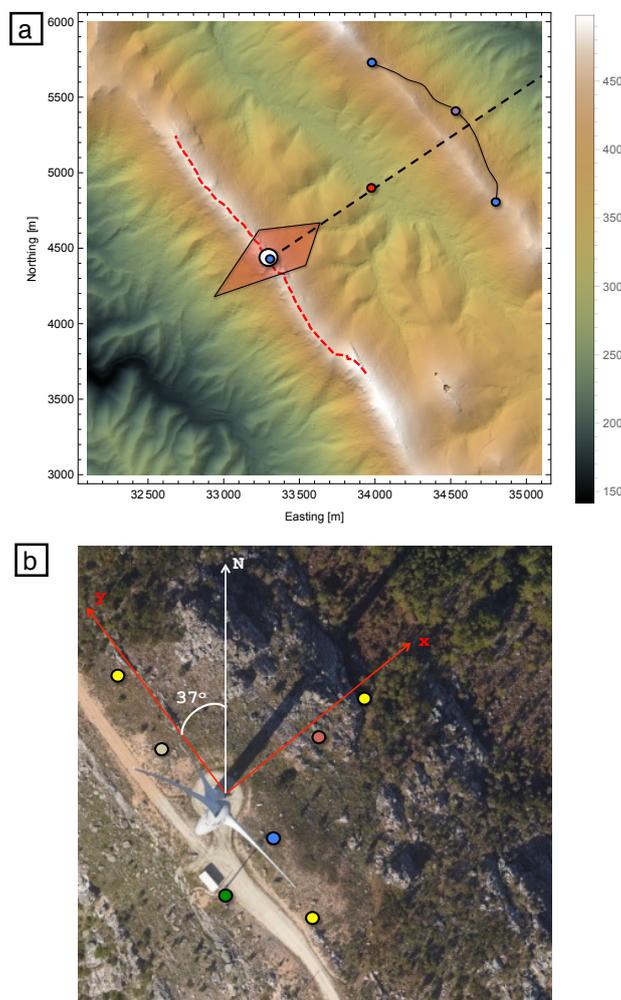


Figure 6. Perdigão site: (a) Overall view (blue circles, long-range WindScanner units; white circle, wind turbine; pink quadrilateral, diamond scan; dashed black line, transect scan; red circle, virtual mast scan; solid black lines, power cables; red dashed line, ridge scan); (b) Top view around the wind turbine (yellow circles, short-range WindScanner units; blue circle, long-range WindScanner unit Whittle; grey circle, control centre; red circle, calibration pole; green circle, telecom tower and substation)

4.6 Step 6: deployment and calibration procedures

After all scanning lidars were positioned, oriented, and leveled at the designated locations (see Vasiljević, 2015b), their absolute positions were acquired using a multi station (combination of total station and GPS) in the conjunction with DGPS/RTK correction data (accuracy about 1 cm). The correction data was provided by the Geographic Institute of the Portuguese Army.

- 5 Additionally, the absolute position of several landmarks (e.g. wind turbine) were acquired and used for the WindScanner' calibration.



For assessing the pointing accuracy of LRWSs, selected landmarks were mapped with the LRWSs laser beams using the CNR (carrier-to-noise) mapper (pg. 157, Vasiljević, 2014b). The power line tower on the North ridge was mapped with Whittle, whereas the telecom tower next to the wind turbine was mapped with Koshava and Sterenn. The comparison of the referenced and mapped positions indicated a static pointing accuracy of 0.05° in azimuth and elevation for all three LRWSs. From the CNR maps we were able to determine the backlash level of 0.025° , which is consistent with results from previous deployments
5 (see Vasiljević et al., 2016a). The sensing range accuracy was assessed using the same landmarks. The laser beams were steered to hit the landmarks, and we assessed the range gate positions (i.e., distances along LOS) at which the intensity of the backscattered light (CNR) was maximum, since these positions correspond to the distances between the landmarks and LRWSs. We found sensing range offsets of 10, 3 and 8 m for Sterenn, Whittle and Koshava respectively, which were corrected for during the design of the scanning methods.

10 Since the DC component in the SRWS Doppler spectra is notched out, non-moving hard targets cannot be used to assess the pointing and sensing range accuracy of the SRWSs. On the contrary, for the SRWSs we employed a 12 m calibration pole with a two motor-driven balls on the top made of low-density polyether (Figure 7a). The rotating balls were scanned simultaneously from the three SRWSs by mapping three separate $2\text{ m} \times 2\text{ m}$ vertical planes, oriented perpendicular to the pointing direction of each instrument. In Figure 7b, the result of such a scan is presented, where only the signals from the two rotating balls are
15 highlighted. When the mapped positions of the balls were compared with the reference positions, we found similar pointing accuracy level of the SRWSs to the accuracy level of the LRWSs. The rotating balls were also used to assess the sensing range accuracy. The three laser beams were steered to meet the centre of the top rotating ball and the focus points were moved along the laser beam propagation paths. The results of this test, Figure 8, depict the intensity of the backscattered signal of each of the SRWSs versus the distance of focusing, and the theoretical distribution of the intensity based on the assumption that the
20 intensity of a focused laser beam follows a Lorentzian distribution. It is assumed that the maximum intensity appears at the distance where the moving target is located in regards to a SRWS. It has been found that the calculated and measured distances corresponded to each other to a few centimeters.

4.7 Step 7: scanning modes design

Five scanning modes, Table 4, were designed to uncover the flow details around the wind turbine and in the valley: ridge,
25 diamond, and transect scans in the case of the LRWS, and T and vertical plane scans in the case of the SRWS.

The ridge scan was designed to address the flow above the South ridge (Table 4 and Figure 6). The two LRWSs, Koshava and Sterenn, were configured to intersect their laser beams and to move the beam intersection along a curved line 2 km long, 80 m above the crest (i.e. the wind turbine hub height), following the terrain profile (see Vasiljević, 2016c). The line was designed using the point cloud information.

30 To investigate the inflow and wake conditions of the wind turbine at a large scale, Koshava and Sterenn were configured to guide the laser beams within a 4.7° vertically inclined quadrilateral with the center at the turbine hub, and dimensions of $500\text{ m} \times 750\text{ m}$. The quadrilateral lies on an inclined horizontal plane defined by Koshava, Sterenn and hub position. The wind turbine hub represented the middle point of a 1-km long diagonal of the quadrilateral. Along this diagonal, Koshava and

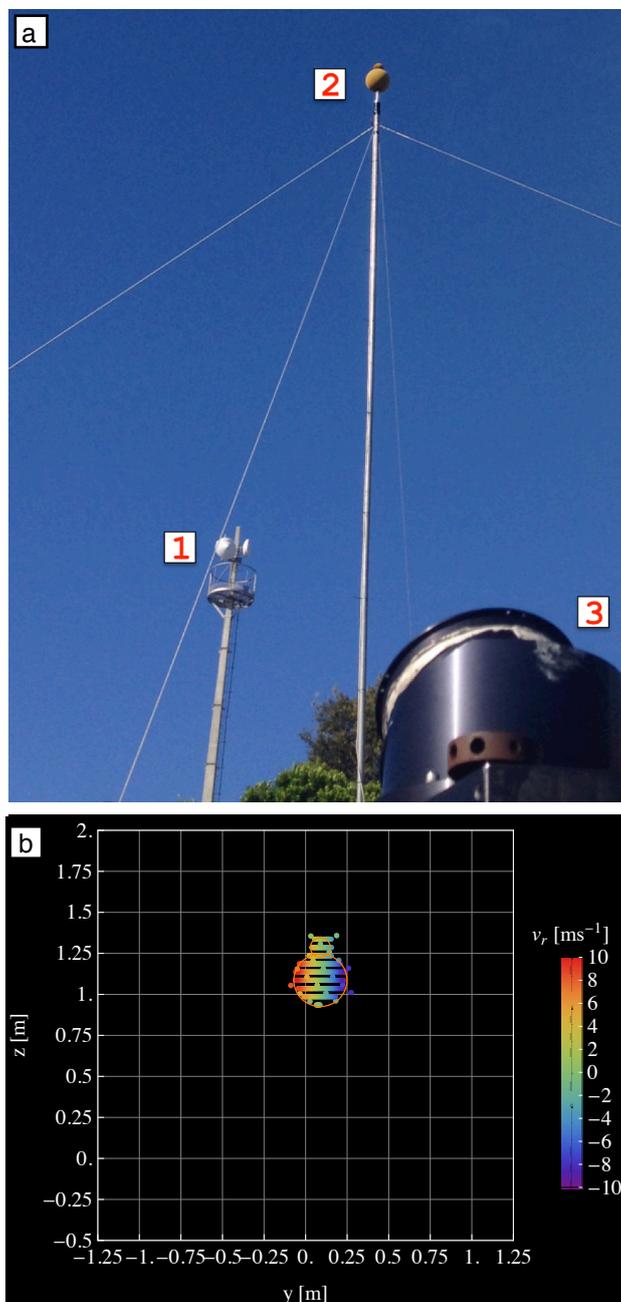


Figure 7. Calibration of SRWS: (a) actual setup (1 - telecom tower, 2 - calibration pole with two motor-driven balls and 3 - SRWS's scanner head); (b) radial wind speeds induced from the rotation of the two rotating balls as measured by R2D1 (the perimeter of the two balls is depicted with orange circles)

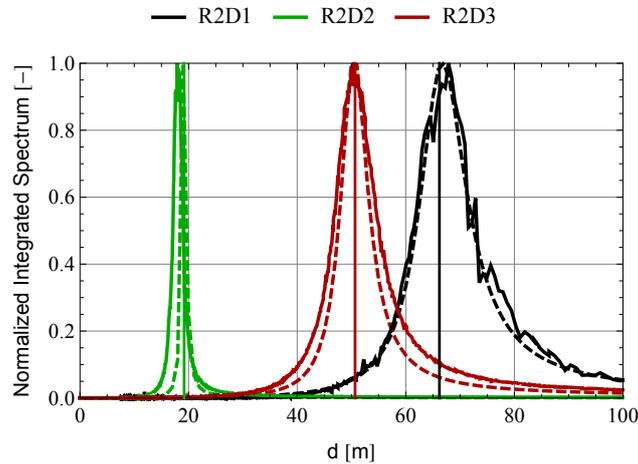


Figure 8. Integrated spectrum versus focus distances for R2D1 (black line), R2D2 (green line), and R2D3 (red line)

Sterenn synchronously intersected laser beams and move the beam intersection resolving instantaneous horizontal wind speed and wind direction (true dual-Doppler) at 50 points, thus every 20 m (see Vasiljević, 2016a). Since the beams were guided within the same plane, this allowed retrieval of horizontal wind speed and wind direction (not instantaneous) in an additional 2450 measurement points (Table 4 and Figure 6). In these additional points Koshava and Sterenn acquire radial wind speed asynchronously. The scan mode was named the diamond scan. It is important to notice that the diamond scan does not consist of two synchronized plan position indicator (PPI) scans, but of two synchronized user-defined scans. Moving a laser beam within an inclined horizontal plane requires variable elevation angle which is a function of the azimuth angle. Also, since the wind characteristics are such that the wind direction is mainly either Northeast or Southwest, the diamond scan can be used to measure simultaneously the inflow and wake independently of the wind direction. The objective with the diamond scan was to obtain data for studying the wind speed deficit up to five diameters downstream of the wind turbine, the wake position and wake geometry in a horizontal plane with the centre at the wind turbine hub, as well as the inflow conditions up to five diameters upstream of the wind turbine.

In addition to the large scale flow observations, two scanning modes for the short-range WindScanner system (Table 4 and Figure 9) were configured to provide insights on the inflow and wake at the turbine scale. The T-scan was used to measure the turbine inflow conditions. Two different versions of this mode were used, differing in the dimensions of the scanning area. Both of them consisted of one vertical and one horizontal plane that were perpendicular to each other and perpendicular to the South ridge line. In Figure 9a, we can see the first version in the Cartesian coordinate system, with the origin in the wind turbine base rotated 37° clockwise from North. The area covered with the first scan mode version was from -56 m to 56 m along the y-axis, 0 m to 80 m along the x-axis, and from 14 m to 78 m along the z-axis. Within the enclosed area, 15 horizontal and 9 vertical line scans were performed. The second version covered an area between -64 m to 64 m along the y-axis, -10 m to 100 m along the x-axis, and 14 m to 78 m along the z-axis, encompassing 17 horizontal and 9 vertical line scans. To address the

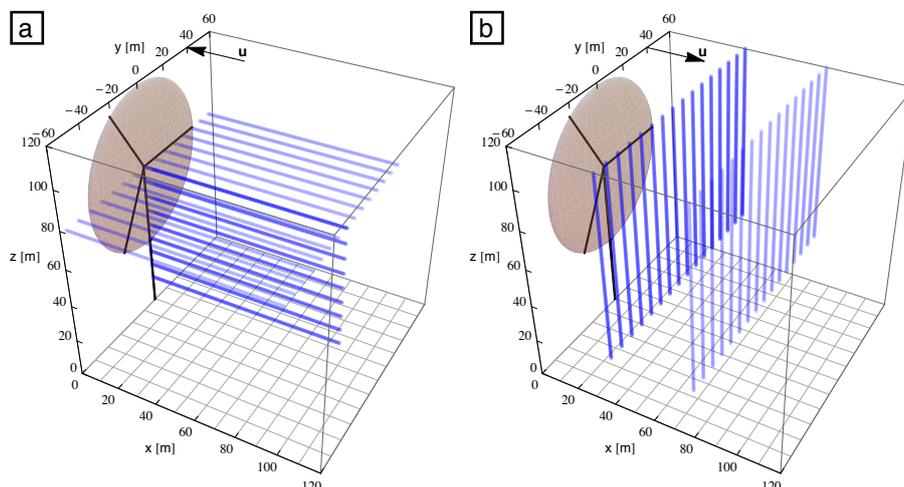


Figure 9. Scanning patterns of short-range WindScanners: (a) T-scan; (b) vertical planes.

wake conditions with the short-range WindScanner system the vertical scan mode consisting of vertical lines was employed, Figure 9b. Also, two different versions of the scanning mode were used. Both of them focused on scanning in vertical lines placed in a plane parallel to the wind turbine's rotor. The scanning plane was confined in the y - z plane, between -48 and 48 m along y , and between 30 and 128 m along z . In the first version of the scanning pattern the vertical scanned lines were located in a vertical plane one rotor diameter (80 m) away. In the second version one more plane with the same dimensions was added half a rotor diameter in the downwind direction.

Due to the commanded scanning speed exceeding the kinematic limits in the SRWSs, the second version of the patterns were not performed synchronously. A delay between the individual units was observed, the magnitude of which was increasing with time (e.g. 30 seconds after 100 min of operation) and reset whenever the SRWS were commanded to restart a scanning pattern. The reset of the patterns was not occurring in a systematic mode, because it was associated with the parameter that data was acquired only when the wind direction was either in the Northeast or Southwest sector and the selection of the scanning pattern was done manually.

The transect scan was employed to investigate the flow field within a vertical plane perpendicular to the ridges entailing the wind turbine (Table 4, Figures 6 and 10). The three LRWSs were configured to perform intersecting and synchronized Range-Height Indicator (RHI) scans. The RHI scan of Whittle coincided with the vertical plane (Figure 10), whereas other two RHI scans sliced through this plane along a 500-m vertical line position in the valley (see vertical dashed line in Figure 10). The radial wind field measured by Whittle provided the possibility to assess the recirculation zone on lee sides of either ridge in the case of Southwest and Northeast winds, traces of the wind turbine wake, and the flow in the valley (see Vasiljević, 2016d). The intersection of the three RHI scans represented a 500-m virtual mast, thus it provided measurements of horizontal wind speed and wind direction. Even though we had three independent LOS measurement along the virtual mast line due to

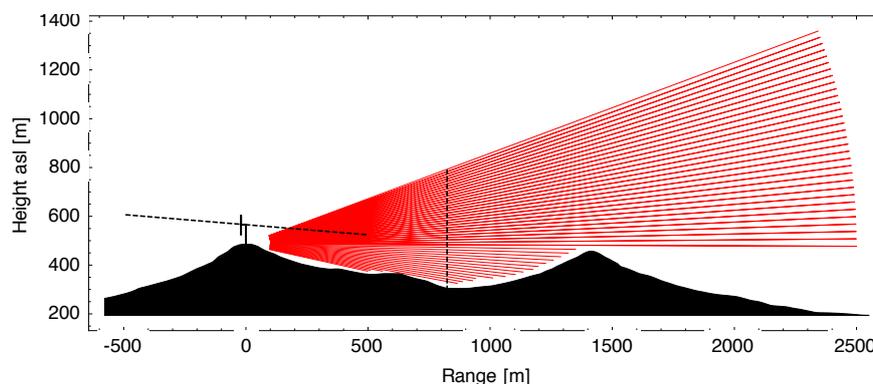


Figure 10. Transect Scan: red lines indicate LOS measurements acquired by Whittle, vertical dashed line shows the position of the virtual mast, and inclined horizontal dashed line the position of the diamond scan plane

20 low elevation angles the vertical wind speed was not considered in the data analysis (see details in Berg et al., 2015; Vasiljević et al., 2016a).

The long-range WindScanner system's scans were run in a batch mode, where each strategy was executed over a 10-min period. The sequence of the ridge, diamond and transect scan was executed over a 30-min period, and then repeated. Because only Koshava and Sterenn were needed to execute the ridge and diamond scans, Whittle continued to perform the transect
5 strategy throughout the entire campaign.

The Portuguese weather service (IPMA) provided a daily forecast for the Perdigão site using a non-hydrostatic numerical weather prediction model of limited area (AROME, the numerical prediction model of Meteo-France) for variables such as temperature, relative humidity, rain, wind direction and velocity at 10 m and 80 m agl. The wind direction was used to decide the scanning mode of the short-range WindScanner system: the vertical mode if the wind was coming from Southwest direction, or the T-scan mode in the case of Northeast wind.

5 4.8 Step 8: execution and data collection

Throughout the course of the experiment visits to the WindScanners and hardware checks were performed several times per day in the first three weeks of the experiment, as fine adjustments of the scanning modes were needed, and then every other day in the last stage of the experiment. Also, the staff at the site during the first three weeks decreased from ten to one single person, who managed the whole setup until the end. The status of the experiment was reported daily on the dedicated web
10 blog (see Vasiljević, 2015a, for more details). The data was collected every third day and transmitted to the database at DTU. Preliminary data analysis was done on the fly for quality and quantity assessing. This assessment was of particular importance since it helped in making decision in extending the length of the experiment from the originally planned four weeks to the total of eight weeks.



Table 4. Scanning modes

Scanning mode	LRWS system			SRWS system	
	Ridge	Diamond	Transect	T	Vertical
WindScanners	Koshava	Koshava	Koshava	R2D1	R2D1
	Sterenn	Sterenn	Sterenn	R2D2	R2D2
			Whittle	R2D3	R2D3
Variables	u, v	u, v	u, v, v_{LOS}	u, v, w	u, v, w
LOS sampling (Hz)	2	2	2	100	100
Points per scan	100	2500	50 u, v , 12000 v_{LOS}	350	312
Scans per 10 min	12	24	24	9	9
Probe length (m)	35	35	35	0.7–38	1.7–47
Synchronization (Max lag (ms))	10	10	10	20	20
Dynamic ranging	Yes	Yes	Yes	-	-
Dynamic focusing	-	-	-	Yes	Yes

Although, this was the first time the long and short-range WindScanner systems were used simultaneously, because of several reasons we only collected a few periods of simultaneous measurements. Despite the rapid installation of the WindScanner systems, the off-grid power solution for the long-range WindScanner system was deployed roughly ten days after the short-range WindScanner system started collecting data. An issue with the control unit of one of the LRWSs forced us to reject the measurements during May 23–25 (see the blog post for these dates). The cooling systems of long and short-range WindScanners could not cope with the high temperature around midday ($\geq 40^\circ\text{C}$) and we had to pause the measurements for a couple of hours every day. The short-range WindScanner system had a technical issue with the MACRO ring which halted the short-range WindScanner observations during June.

4.9 Step 9: decommissioning and post-calibration procedures

At the end of the measurement period the pointing and sensing range accuracy were reassessed with the LRWSs only. We found that the new positions of the landmarks matched the previously mapped position within 0.05° in azimuth and elevation for all three LRWSs. The backlash levels remained the same, 0.025° . The new set of sensed distances showed no difference comparing to the previously acquired set. Due to technical issues of the SRWSs, the post-calibration procedure was not performed for this system. After the post-calibration procedure the WindScanners were removed from their locations, and nature returned to the original shape.



4.10 Step 10: data dissemination and availability

30 The short-range WindScanner system was operational from May 8 until June 3. During this period, 110 hours (665 runs with a duration of 10-min each) of data were acquired. A total of 407 runs were made with the T-scan mode, addressing inflow conditions, whereas the remaining 258 were made by employing the vertical planes mode, addressing wake conditions. The long-range WindScanner system was operational from the May 19 until June 26. Overall, the long-range WindScanner system acquired 528 hours of data, of which about 180 hours of data were recorded with each scanning strategy. A special case is the transect scan, where besides 180 hours of concurring data acquired with all three LRWS, there is also the additional 360 hours of data collected only by Whittle.

There are 6 hours of simultaneous measurements of the inflow conditions with both WindScanner systems. Also, for the entire measurement period (May-June) the owner of the wind turbine (Generg) provided 10 minute means of the wind turbine SCADA data. Table 5 summarizes data availability.

The acquired datasets of radial velocities were entirely processed and data artifacts removed. The LRWS dataset was filtered on the CNR values of each individual measurement point ($CNR > -27$ dB). Besides the filtering, a multi-range gate analysis was applied to remove remaining spurious data points where, using multi-peak detection in the CNR values for each LOS, data points contaminated with hard targets were removed. Also, by detecting discreet jumps in the radial speed values along each LOS, errors of the spectral estimation were rejected from the datasets. Details about the multi-range gate analysis will be presented in a separate publication.

The SRWS data were first filtered to remove signals that originated from hard target motions (i.e. wind turbine blades). These signals are relatively easy to detect due to the corresponding high intensity power spectral density that appear in the Doppler spectra, as a result of the increased backscattered light from hard targets, relative to the one from aerosols. Afterwards, the data are filtered by using an adaptive threshold of acceptable maximum and minimum of the total energy of the laser Doppler spectra. The threshold value is calculated by the lower and upper outer fences of the distribution of the total energy per spectrum. Consequently, the data were spatially averaged after being grouped in cubic grid cells both of $4 \times 4 \times 4$ m and $8 \times 8 \times 8$ m dimensions. To treat the synchronization issues that appeared in the expanded T-scan and Vertical plan patterns, the data acquired using those pattern versions were additionally time averaged in 10-min periods.

Where possible, the processed radial velocities were combined to calculate two or all three components of the wind vector. Afterwards, wind vector and radial fields were averaged over a 10-minute period and plotted. The resulting figures were saved as PNG files, available for user to visually browse the dataset. To indicate the amount of high-quality data collected with the long-range WindScanner system, we applied a simple filter on sampling constraints after processing all data, which consisted of selecting only those 10 minute runs where there was at least 50% of maximum number of scan iterations and at least 50% of the maximum number of measurement points. The results are given in Table 5 only for the long-range WindScanner system. Currently, the SRWS data is inspected in more details, where each 10-minute period is manually evaluated in order to determine whether the wake or induction zone are captured with measurements. This is the reason why Table 5 does not include information on the SRWS data.



Table 5. Data availability expressed in hours. Only periods when all three LRWSs operated for each scanning mode are considered in the calculation.

Scanning mode	LRWS system		
	Ridge	Diamond	Transect
Data before filtering on sampling	187	185	181
Data after filtering on sampling	77	94	116
of which in Northeast sector	7.5	10	15
of which in Southwest sector	19	16	12

Both, raw and highly processed datasets have been uploaded to a MySQL database and are currently available for the participants of the projects that funded the experiment. We intend to release the entire dataset for public use in two phases: during the first half of 2017, a subset of data made strictly for the NEWA project (ridge and transect scans) will be available through the NEWA web site (<http://www.neweuropeanwindatlas.eu>) and Wind Data web site (<http://www.winddata.com>). In the second half of 2017, the remaining dataset will be publicly available via the same web pages. At present, the data is being analyzed by the research groups directly involved in Perdigão-2015, and has been presented in appropriate forums. Examples of those presentations and publications are for instance, Mann et al. (2016) on the details of the experiment, Rodrigues et al. (2016) focused on the flow in the valley and over the two-ridges, Hansen et al. (2016) on the wind turbine wake, and Meyer Forsting et al. (2016) on the inflow conditions.

5 Discussion

5.1 Observational results

Figures 11 to 14 intend to illustrate the performance of the scanning modes and also be a sample of the observations and flow phenomena being present.

The ridge scan, 2 km along the South ridge, shows no turning of the wind for Northeast winds (Figure 11a). On the other hand, for Southwest winds there is a slight divergency in the flow lines (difference between the wind direction at the edges of the transect is roughly 15° , Figure 11b). The maximum wind speed along the transect is not at the wind turbine location regardless of the dominant wind direction (Figures 11).

The initial data analysis of the wake measurements indicate a clear diurnal dependence of the wake characteristics (see Hansen et al., 2016), which may be related to the stratification. A well-formed, narrow and long wake was pulled down the slope during late nights until early mornings, when we expected stable conditions and reduced mixing (Figures 12a and 13a). On the other hand, during the rest of the day under more unstable conditions and increased mixing, the wake was wider, shorter

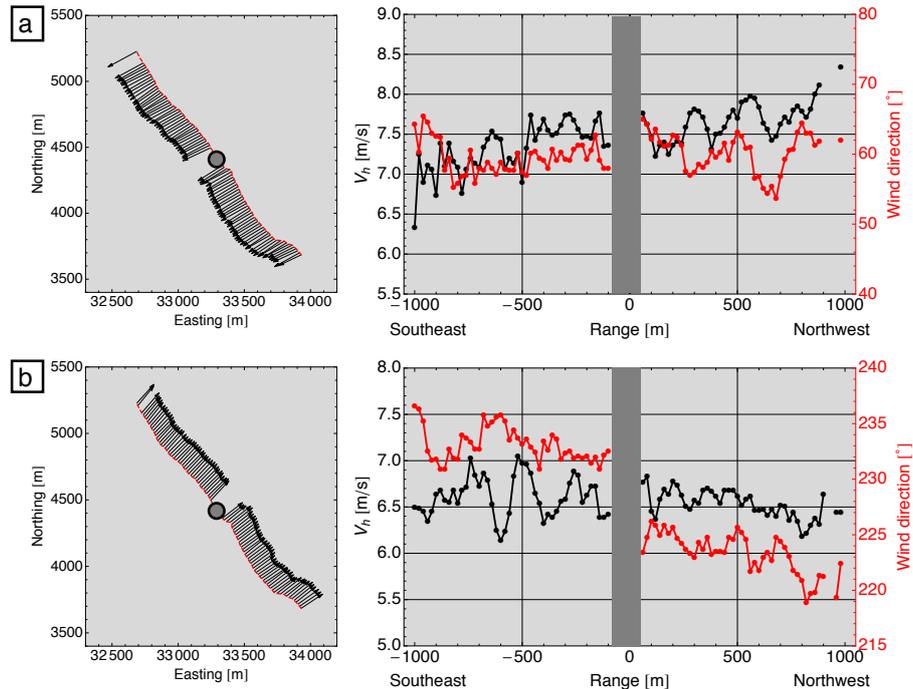


Figure 11. Wind vectors, wind speed and direction (10-min averaged), 80 m agl along the South ridge for wind dominant directions: **(a)** Northeast (measurements taken on June 7 2015 from 03:30 to 03:40 UTC); **(b)** Southwest (measurements taken on June 21 2015 from 21:42 to 21:52 UTC). Black line, horizontal wind speed; red line, wind direction; dashed red line, ridge scan; grey circle (left) and rectangle (right) areas where measurements are erroneous due to the presence of the wind turbine.

and lifted up (Figures 12b and 13b). The inflow and wake of the turbine during a one full day is well represented in Vasiljević (2016b).

The objective of the transect scans (Figure 14, left and right) was the mapping of the flow over the ridges and in the valley. For the dominant wind directions Northeast and Southwest (Figures 14a and 14b) the recirculation zones on the lee sides (south side of the North ridge and north side of the South ridge) of the hills can be seen, as suggested by the computational results in Figure 5. Although sharing a common feature, these two figures correspond to two different days (7 and 10 of June) and two different times (03:29 and 13:43 UTC), night and day at a time of low and high temperature. The velocity field at 03:19, Figure 14a displays a pattern, a two-layer atmosphere of maximum wind speed at around 500 m and 750 m, and a constant wind speed between 500 and 650 m. Figure 14c, around the same time in the night, displays a stratified atmosphere with a well-defined internal wave, originating in the South ridge, of a length equal to the distance between ridges (see 24H animation Vasiljević, 2016e). This phenomenon and the conditions under which it can persist, although a subject in Rodrigues et al. (2016), will be studied further.

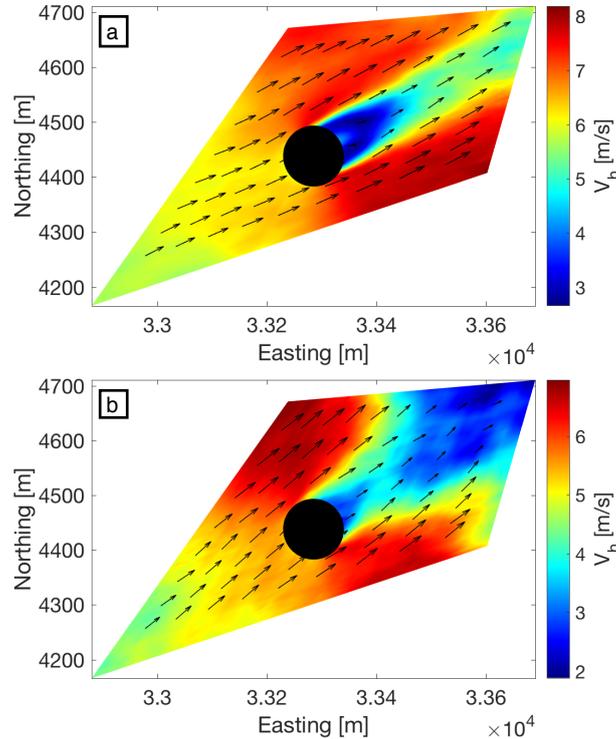


Figure 12. The wake in a horizontal plane observed with the diamond scan (10-min averaged) for different atmospheric conditions: **(a)** stable conditions (measurements taken on June 10 2015 from 22:20 to 22:30 UTC); **(b)** unstable conditions (measurements taken on June 11 2015 from 16:02 to 16:12 UTC). The black circle represents rotor swept area.

5.2 Improving the methodology

In this paper we presented the methodology for conducting field studies with multi-Doppler lidars. This was a preliminary attempt to outline and define systematic steps that can lead to the acquisition of high-quality datasets from field studies. The application of the methodology on the Perdigão 2015 helped in devising future improvements.

Simulation results could be used to assess whether WindScanners can capture the desired flow features by basically simulating the flow study itself. This calls for the integration of an end-to-end WindScanner measurement process simulator with a flow model (e.g., Vasiljević et al., 2011). The simulation of flow study is useful for selecting an appropriate type of WindScanner (pulsed and/or CW lidar) and number of WindScanner units, and designing and optimizing scanning strategies that can capture desired flow features.

As the WindScanner wind vector retrieval accuracy is influenced by the LOS uncertainty, pointing accuracy, and retrieval technique, extending the simulator with the lidar measurements uncertainty model would provide grounds for a preliminary accuracy assessment and an optimization of the WindScanner installation locations. In order to track the LOS accuracy, the WindScanner measurements should be regularly checked during the field study. This can be done by employing a simple and

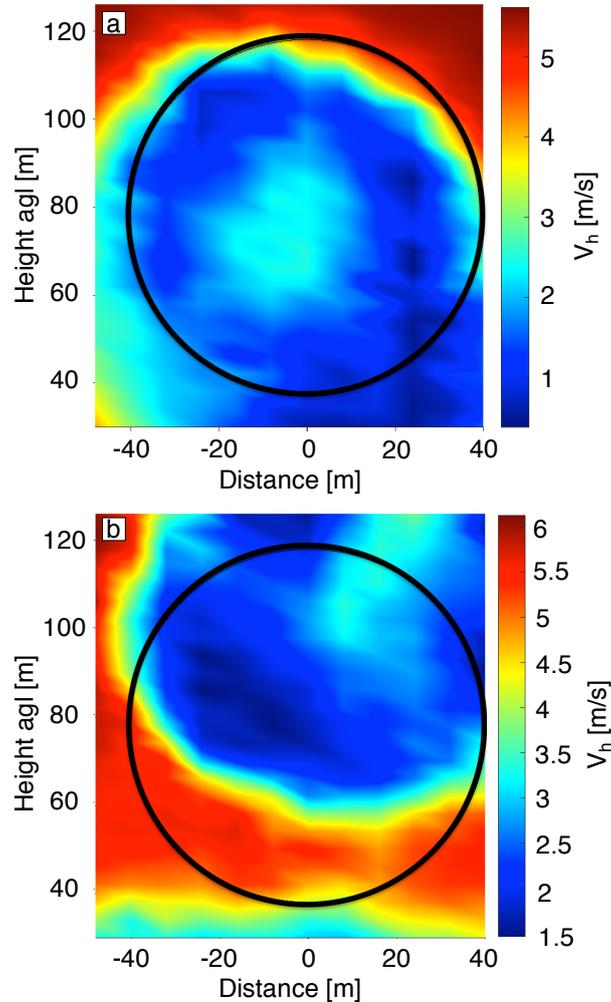


Figure 13. Wind speed (10-min averaged) wake in a vertical plane one rotor diameter away from the turbine observed with the vertical planes scans: **(a)** wake pulled down (measurements taken on June 12 2015 from 00:40 to 00:50 UTC); **(b)** wake lifted up (measurements taken on June 11 2015 from 19:10 to 19:20 UTC). Black circle, rotor swept area.

20 not necessarily tall mast on the field study site and installing a minimum one sonic anemometer on the mast top. The mast top should be visible from every WindScanner location, and preferably the mast top location should coincide with one of the measurement points.

To better assess static pointing accuracy more than one hard targets should be used and mapped prior, during, and after the field study. The number of hard targets could correspond to the number of static errors (e.g., leveling, mirror alignment, etc.),
25 since this would allow calculating the coordinate system for steering the laser beams that can compensate for static errors (see

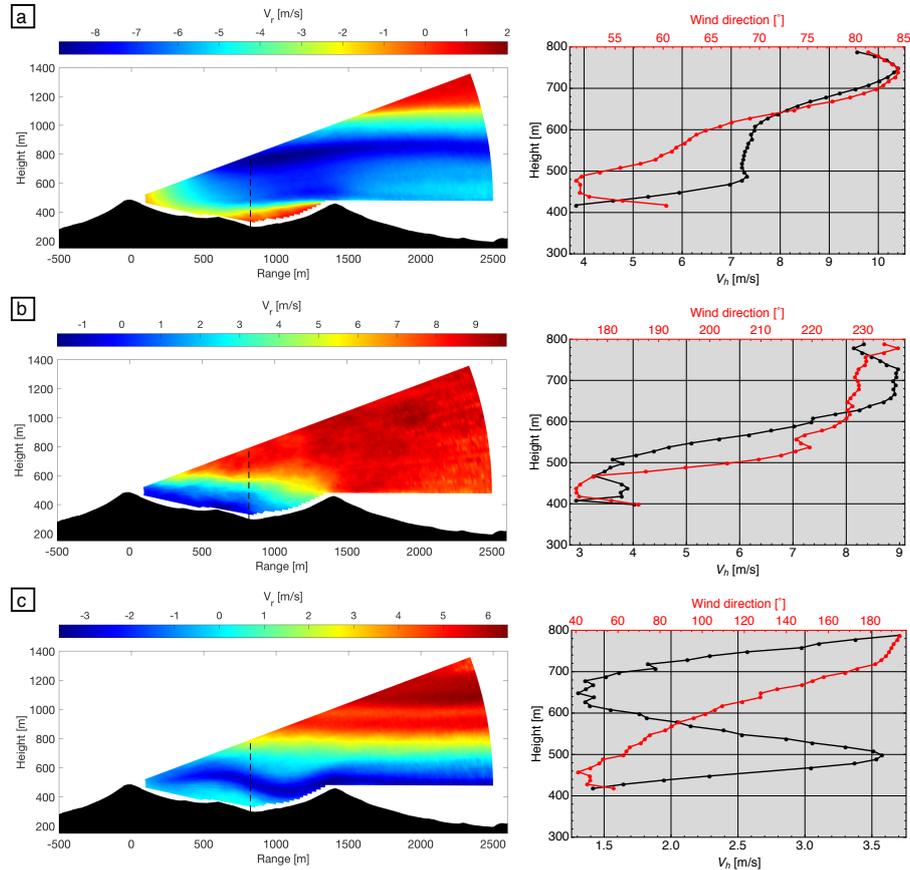


Figure 14. Radial flow fields (10-min averaged) in a vertical plane (left figures) and corresponding virtual mast measurements of the horizontal wind speed and wind direction (right figures): **(a)** Northeast dominant wind, recirculation zone on the North ridge (measurements taken on June 7 2015 from 03:19 to 03:29 UTC); **(b)** SouthWest dominant wind, recirculation zone on the South ridge (measurements taken on June 10 2015 from 13:33 to 13:43 UTC); **(c)** Northeast dominant wind, atmospheric internal wave (measurements taken on June 10 2015 from 03:32 to 03:42 UTC). Negative and positive radial wind speeds indicate winds going towards and away from the lidar, black and red solid curves correspond to the horizontal wind speed and wind direction, and the dashed black line indicates position of the virtual met mast. Note that colour pattern of the radial velocity field (left) is not the same in every figure.

pg. 105., Vasiljević, 2014b). Mapping hard targets in several instances during the field study would provide means to update the compensating coordinate system.

The methodology for atmospheric multi-Doppler lidar experiments was applied in the pilot study Perdigoão-2015, which serves as an introductory campaign to more extensive and longer planned field studies within the NEWA project. In this field campaign the long-range and short-range WindScanner systems were used simultaneously for the first time. Also, it was the first time that these instruments were deployed in a harsh and remote site. Over a short period of time, both systems were installed at the designated locations. The established WindScanner calibration and configuration procedures, which were previously



used in flat terrain, were successfully applied in the heavily complex terrain of Serra do Perdigão. A static pointing accuracy of 0.05° , and a high level of the synchronization among WindScanners was achieved. Also, two long-range WindScanners on the North ridge were powered by diesel generators without interruptions during their operation.

5 A significant step has been made towards coupling of the long-range and short-range WindScanner systems into a hybrid WindScanner system. Namely, the scanning strategies were designed and implemented in such a way as to achieve symbiosis of the two WindScanner systems. However, due to the earlier mentioned issues (see Section 4.8), we only collected several hours of simultaneous measurements with both WindScanner systems.

10 Despite the environmental conditions, challenges imposed by the site, and technical issues with the instruments, high-quality observations of the various flow aspects of the Perdigão site have been acquired, with a few highlights outlined in this paper. Also, the data sets are used for the design of a longer, and instrumentation-wise more extensive Perdigão-2017 field campaign, that will take place in the first half of 2017 over a period of six months.

6 Conclusion

15 The methodology for atmospheric multi-Doppler lidar experiments was developed and applied to the Perdigão-2015 field campaign. We described the 10 steps which constitute the methodology and explained how each step was implemented in the field campaign. The application of the steps resulted in a high pointing accuracy and temporal synchronization of the WindScanners. Five novel scanning modes were designed, three in the case of the long-range, and two in the case of the short-range WindScanner system, with the purpose of characterizing the overall flow pattern over the double-ridge site. Each scanning mode followed a specific purpose, disclosing a particular aspect of the flow. Because the larger area was covered
20 by the WindScanner measurements compared to standard tower based anemometry, a more detailed view of the atmospheric flow was possible, which increased our understanding on the interplay between the large synoptic scales associated to the weather conditions and the site. An important step was made towards the realization of a hybrid WindScanner system, based on both pulsed and CW lidar technology. Overall, the methodology and its application layout foundations for much larger future endeavors that will take place within the NEWA project.

25 *Acknowledgements.* The authors are grateful to the following institutions, without whom the Perdigão-2015 field campaign would have not been possible. The municipality of Vila Velha de Ródão was extremely useful and always available to answer all our requests, providing solutions to many simple and practical aspects of the experiment that otherwise would have been insurmountable difficulties. We thank Generg for collaboration and support of the field experiment, namely providing power and data connection and for the availability of the wind turbine SCADA data. We thank the Portuguese Institute for Sea and Atmosphere (IPMA) for the daily forecasts. We also thank Regacentro Comércio de Representações Lda for the ingenious solution that enabled off-grid power to two scanning lidars in remote locations. Particularly, we
5 would like to express a special gratitude to Per Hansen and Claus Pedersen from DTU Wind Energy for their dedicated work and positive spirit during the experiment deployment and execution. We are grateful to the FarmOpt, UniTTe, NEWA and WindScanner.eu projects by the financial support of the Perdigão-2015 field campaign. FarmOpt was funded by the Danish Energy Technology Development and Demonstration Program (EUDP), Project No. 64013-0405. UniTTe is financially supported by the Danish Innovation Fund (Innovationsfonden).



Grant No. 1305-00024A. NEWA is an ERANET+ project, which is funded by the European Commission (ENER/FP7/618122/NEWA) and
10 9 national funding agencies. WindScanner.eu was funded by European Commission under the FP7-INFRASTRUCTURES call, Project no.
312372. Finally, the first author would like to express gratitude to the IRPWind mobility program which provided a financial support for his
stay in Portugal during the Perdigoão-2015 field campaign.



References

- Berg, J., Vasiljević, N., Kelly, M., Lea, G., and Courtney, M.: Addressing Spatial Variability of Surface-Layer Wind with Long-Range WindScanners, *Journal of Atmospheric and Oceanic Technology*, 32, 518–527, doi:10.1175/JTECH-D-14-00123.1, 2015.
- 15 Castro, F. A., Palma, J. M. L. M., and Lopes, A. S.: Simulation of the Askervein Flow. Part 1: Reynolds Averaged Navier-Stokes Equations ($k - \varepsilon$ Turbulence Model), *Boundary-Layer Meteorology*, 107, 501–530, doi:10.1023/A:1022818327584, <http://link.springer.com/article/10.1023/A%3A1022818327584>, 2003.
- Delta Tau: Motion and Control Ring Optical Ring, <http://www.macro.org>.
- 20 EWEA: Prioritising Wind Energy Research: Strategic Research Agenda of the Wind Energy Sector, Tech. rep., EWEA–European Wind Energy Association, 2005.
- EWEA: Strategic Research Agenda and Market Deployment Strategy. From 2008 to 2030, Tech. rep., TPWind European Wind Energy Technology Platform / European Wind Energy Association, 2008.
- Floors, R., Peña, A., Lea, G., Vasiljević, N., Simon, E., and Courtney, M.: The RUNE Experiment—A Database of Remote-Sensing Observations of Near-Shore Winds, *Remote Sensing*, 8, 2016.
- 25 Gomes, V.: The Wind Flow over Serra do Perdigoão. Computational preliminary studies, Tech. Rep. CESA2010.VCG03.A, CEsa - Centre for Wind Energy and Atmospheric Flows, Faculdade de Engenharia da Universidade do Porto, Rua Dr Roberto Frias s/n, 4200-465 Porto, Portugal, 2011.
- Hansen, K., Larsen, G., Menke, R., Vasiljević, N., Angelou, N., Feng, J., Zhu, W., Vignaroli, A., W, W. L., Xu, C., and Shen, W.: Wind turbine wake measurement in complex terrain, *Journal of Physics: Conference Series*, 753, 032 013, <http://stacks.iop.org/1742-6596/753/i=3/a=032013>, 2016.
- 30 INEGI: Perdigoão's Wind Farm (In *Portuguese*), Wind farm study, INEGI, 2005.
- Jackson, P. S. and Hunt, J. C. R.: Turbulent wind flow over a low hill, *Quarterly Journal of the Royal Meteorological Society*, 101, 929–955, doi:10.1002/qj.49710143015, 1975.
- 35 Lange, J., Mann, J., Angelou, N., Berg, J., Sjöholm, M., and Mikkelsen, T.: Variations of the Wake Height over the Bolund Escarpment Measured by a Scanning Lidar, *Boundary-Layer Meteorology*, 159, 147–159, doi:10.1007/s10546-015-0107-8, <http://dx.doi.org/10.1007/s10546-015-0107-8>, 2016.
- Mann, J., Palma, J., Matos, J. C., Angelou, N., Courtney, M., Lea, G., and Vasiljević, N.: Experimental investigation of flow over a double ridge with several Doppler lidar systems, in: 96th American Meteorological Society Annual Meeting, January 2016, New Orleans, LA., <https://ams.confex.com/ams/96Annual/webprogram/Paper284781.html>, recorded presentation at https://ams.confex.com/ams/96Annual/videogateway.cgi/id/31860?recordingid=31860&uniqueid=Paper284781&entry_password=858263, 2016.
- 5 Mann, J., Angelou, N., Arnqvist, J., Callies, D., Cantero, E., Arroyo, R. C., Courtney, M., Cuxart, J., Dellwik, E., Gottschall, J., Ivanell, S., Kuhn, P., Lea, G., Matos, J. C., Rodrigues, C. V., Palma, J. L., Pauscher, L., Peña, A., Rodrigo, J. S., Söderberg, S., and Vasiljević, N.: Complex terrain experiments in the New European Wind Atlas, *Philosophical Transactions of the Royal Society A*, accepted in 2017, 2017.
- 10 Meyer Forsting, A., Troldborg, N., Bechmann, A., Angelou, N., and Vasiljević, N.: Validation of a CFD model with a triple-lidar system upstream of a wind turbine in complex terrain, in: ECCOMAS Congress 2016, Hersonissos (Greece), 5–10 June, <http://orbit.dtu.dk/files/124220216/Eccomas2016.pdf>, 2016.



- Mikkelsen, T.: Lidar-based Research and Innovation at DTU Wind Energy - a Review, *Journal of Physics: Conference Series*, 524, 012 007, <http://stacks.iop.org/1742-6596/524/i=1/a=012007>, 2014.
- 15 Mortensen, N. G., Landberg, L., Troen, I., Petersen, E. L., Rathmann, O., and Nielsen, M.: WAsP Utility Programs, Tech. Rep. Risø-R-995(EN), Risø National Laboratory, Roskilde, Denmark, http://orbit.dtu.dk/files/106312446/ris_i_2261.pdf, 2004.
- Palma, J., Castro, F., Ribeiro, L., Rodrigues, A., and Pinto, A.: Linear and nonlinear models in wind resource assessment and wind turbine micro-siting in complex terrain, *Journal of Wind Engineering and Industrial Aerodynamics*, 96, 2308–2326, doi:10.1016/j.jweia.2008.03.012, <http://www.sciencedirect.com/science/article/pii/S0167610508001037>, 2008.
- 20 Pauscher, L., Vasiljević, N., Callies, D., Lea, G., Mann, J., Klaas, T., Hieronimus, J., Gottschall, J., Schwesig, A., Kühn, M., and Courtney, M.: An Inter-Comparison Study of Multi- and DBS Lidar Measurements in Complex Terrain, *Remote Sensing*, 8, 782, doi:10.3390/rs8090782, <http://www.mdpi.com/2072-4292/8/9/782>, 2016.
- Rodrigues, C. V., Palma, J., Vasiljević, N., Courtney, M., and Mann, J.: Coupled simulations and comparison with multi-lidar measurements of the wind flow over a double-ridge, *Journal of Physics: Conference Series*, 753, 032 025, [http://stacks.iop.org/1742-6596/753/i=3/a=](http://stacks.iop.org/1742-6596/753/i=3/a=032025)
25 032025, 2016.
- Shaw, W. J., Lundquist, J. K., and Schreck, S. J.: Research Needs For Wind Resource Characterization, *Bulletin of the American Meteorological Society*, 90, 535–538, doi:10.1175/2008BAMS2729.1, <http://journals.ametsoc.org/doi/abs/10.1175/2008BAMS2729.1>, 2009.
- Sjöholm, M., Angelou, N., Hansen, P., Hansen, K. H., Mikkelsen, T., Haga, S., Silgjerd, J. A., and Starsmore, N.: Two-Dimensional Rotorcraft Downwash Flow Field Measurements by Lidar-Based Wind Scanners with Agile Beam Steering, *Journal of Atmospheric and Oceanic*
30 *Technology*, 31, 930–937, doi:10.1175/JTECH-D-13-00010.1, <http://dx.doi.org/10.1175/JTECH-D-13-00010.1>, 2014.
- Taylor, P., Mason, P., and Bradley, E.: Boundary-layer flow over low hills, *Boundary-Layer Meteorology*, 39, 107–132, 1987.
- Taylor, P. A. and Teunissen, H. W.: The Askervein Hill project: Overview and background data, *Boundary-Layer Meteorology*, 39, 15–39, doi:10.1007/BF00121863, <http://dx.doi.org/10.1007/BF00121863>, 1987.
- van Kuik, G. A. M., Peinke, J., Nijssen, R., Lekou, D., Mann, J., Sørensen, J. N., Ferreira, C., van Wingerden, J. W., Schlipf, D., Gebraad, P., Polinder, H., Abrahamsen, A., van Bussel, G. J. W., Sørensen, J. D., Tavner, P., Bottasso, C. L., Muskulus, M., Matha, D., Lindeboom, H. J., Degraer, S., Kramer, O., Lehnhoff, S., Sonnenschein, M., Sørensen, P. E., Künneke, R. W., Morthorst, P. E., and Skytte, K.: Long-term research challenges in wind energy – a research agenda by the European Academy of
5 Wind Energy, *Wind Energy Science*, 1, 1–39, doi:10.5194/wes-1-1-2016, <http://www.wind-energ-sci.net/1/1/2016/>, 2016.
- Vasiljević, N.: Flickr photo gallery of Perdigão 2014 site visit, <https://www.flickr.com/photos/zamjatin/sets/72157649022069345/>, 2014a.
- Vasiljević, N.: A time-space synchronization of coherent Doppler scanning lidars for 3D measurements of wind fields, Ph.D. thesis, Technical
5 University of Denmark (DTU), PhD-0027, 2014b.
- Vasiljević, N.: Perdigão-2015 blog, <https://perdigao-2015.tumblr.com>, 2015a.
- Vasiljević, N.: WindScanner installation video, <https://www.youtube.com/watch?v=hsiZ9W4VHwo>, 2015b.
- Vasiljević, N.: Diamond scan animation, <https://www.youtube.com/watch?v=g9brbIXK7F8>, 2016a.
- Vasiljević, N.: Diamond scan 24 H results, https://www.youtube.com/watch?v=5uMdanEQ_2A, 2016b.
- 10 Vasiljević, N.: Ridge scan animation, <https://www.youtube.com/watch?v=CvnJAev69J0>, 2016c.
- 510 Vasiljević, N.: Transect scan animation, <https://www.youtube.com/watch?v=RmLtkP2-KS4>, 2016d.
- Vasiljević, N.: Transect scan 24 H results, <https://www.youtube.com/watch?v=jaNFvtDdhQI>, 2016e.



- Vasiljević, N., Courtney, M., Wagner, R., Mann, J., and Mikkelsen, T.: A windscanner simulator, in: EWEC 2011, Bruxelles (Belgium), 14–17 March, http://orbit.dtu.dk/files/5497505/Vasiljevic_poster_EWEA2011presentation.pdf, 2011.
- Vasiljević, N., Lea, G., Courtney, M., Cariou, J.-P., Mann, J., and Mikkelsen, T.: Long-Range WindScanner System, Remote Sensing, 8, 896, 515 <http://www.mdpi.com/2072-4292/8/11/896>, 2016a.
- Vasiljević, N., Lea, G., Hansen, P., and Jensen, H.: Mobile network architecture of the long-range WindScanner system, Tech. Rep. E-0105, DTU Wind Energy, Roskilde, Denmark, http://orbit.dtu.dk/files/120566712/Mobile_network_architecture.pdf, 2016b.
- Walmsley, J. L. and Taylor, P. A.: Boundary-layer flow over topography: Impacts of the Askervein study, Boundary-Layer Meteorology, 78, 291–320, 1996.
- 520 Walmsley, J. L., Taylor, P. A., and Keith, T.: A simple model of neutrally stratified boundary-layer flow over complex terrain with surface roughness modulation (MS3DJH/3R), Boundary-Layer Meteorology, 36, 157–186, 1986.